



POLYFLOR™
COVERING THE WORLD



Flooring Collection

Commercial and Residential Flooring

Pearlazzo PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT




Chalk Burst 9703




Sailcloth 9719



Mineral 9704

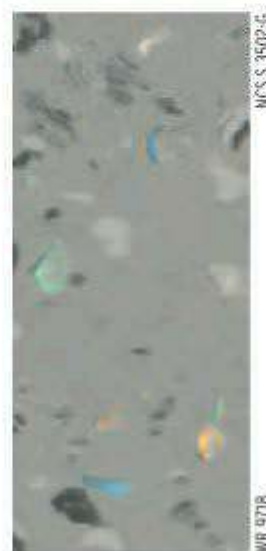

Rain Cloud 9718

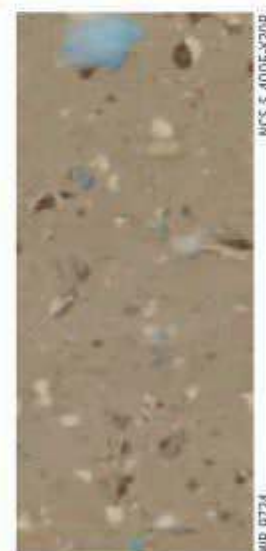

Wholemeal 9724



Truffle 9713

KEY FEATURES

Attractive, high performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.


Highest Group T abrasion rating / EN ISO 10581 Type I.

Unique multi-flake decoration. Conforms to EN649 / EN ISO 10581.



100% RECYCLABLE
25% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com

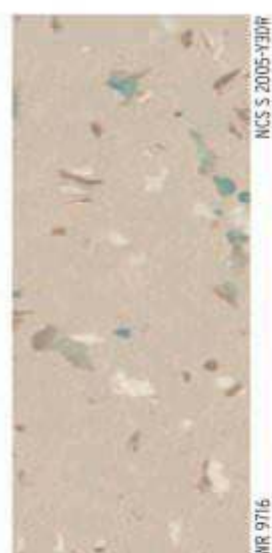

Toasted Almond 9716



Wild Flax 9701



Mint Crisp 9706



Skylight 9709



Seafoam 9710




Autumn Fire 9717



Sandcastle 9712




Lemon Ice 9702

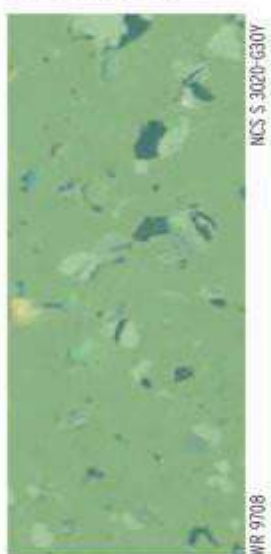

Alpine Meadow 9708



Atlantic Mist 9711

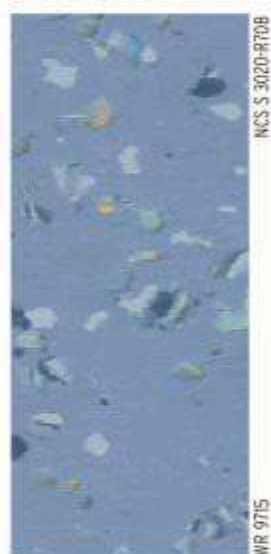

Lilac Bloom 9715




Dark Berry 9725




Caramel 9723



Sunrise 9721

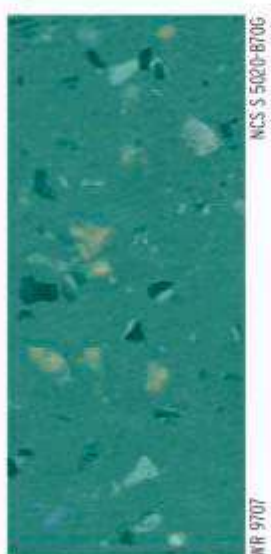

Satin Jade 9707

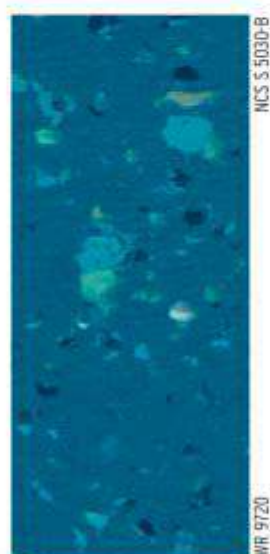

Ocean Ripple 9720



Purple Crush 9722



Charcoal 9705

WR = weld rod

SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Prestige PUR


HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT

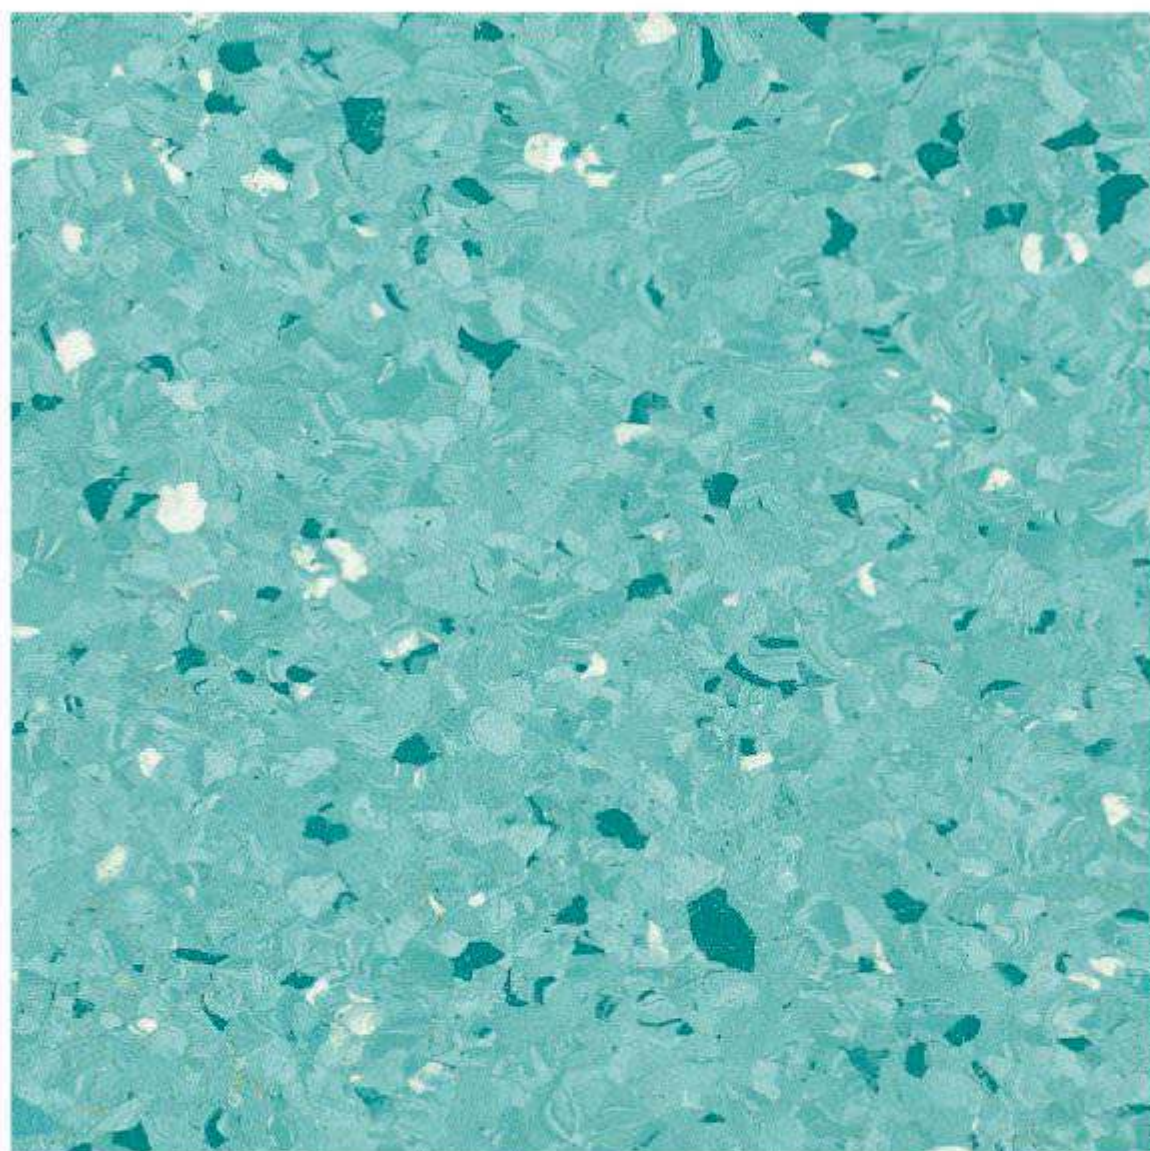


Peppermint 1870




Chive 1880




Lavender Mist 1920



Pale Iris 1800




Stone Blue 1840




Bilberry 1900



Liquorice 1940




Thyme 1890



Nutmeg 1910




Alabaster 1600



Cinnamon 1850




Ice Crystal 1950




Gingerlily 1860



Grey Marl 1930



Chilli 1960



Clove 1830

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with tonal highlight chips.

Conforms to EN 649 / EN ISO 10581.



Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm

AVAILABILITY: Sheet


Tile: 300 x 300mm, 608 x 608mm

Mystique PUR


HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT

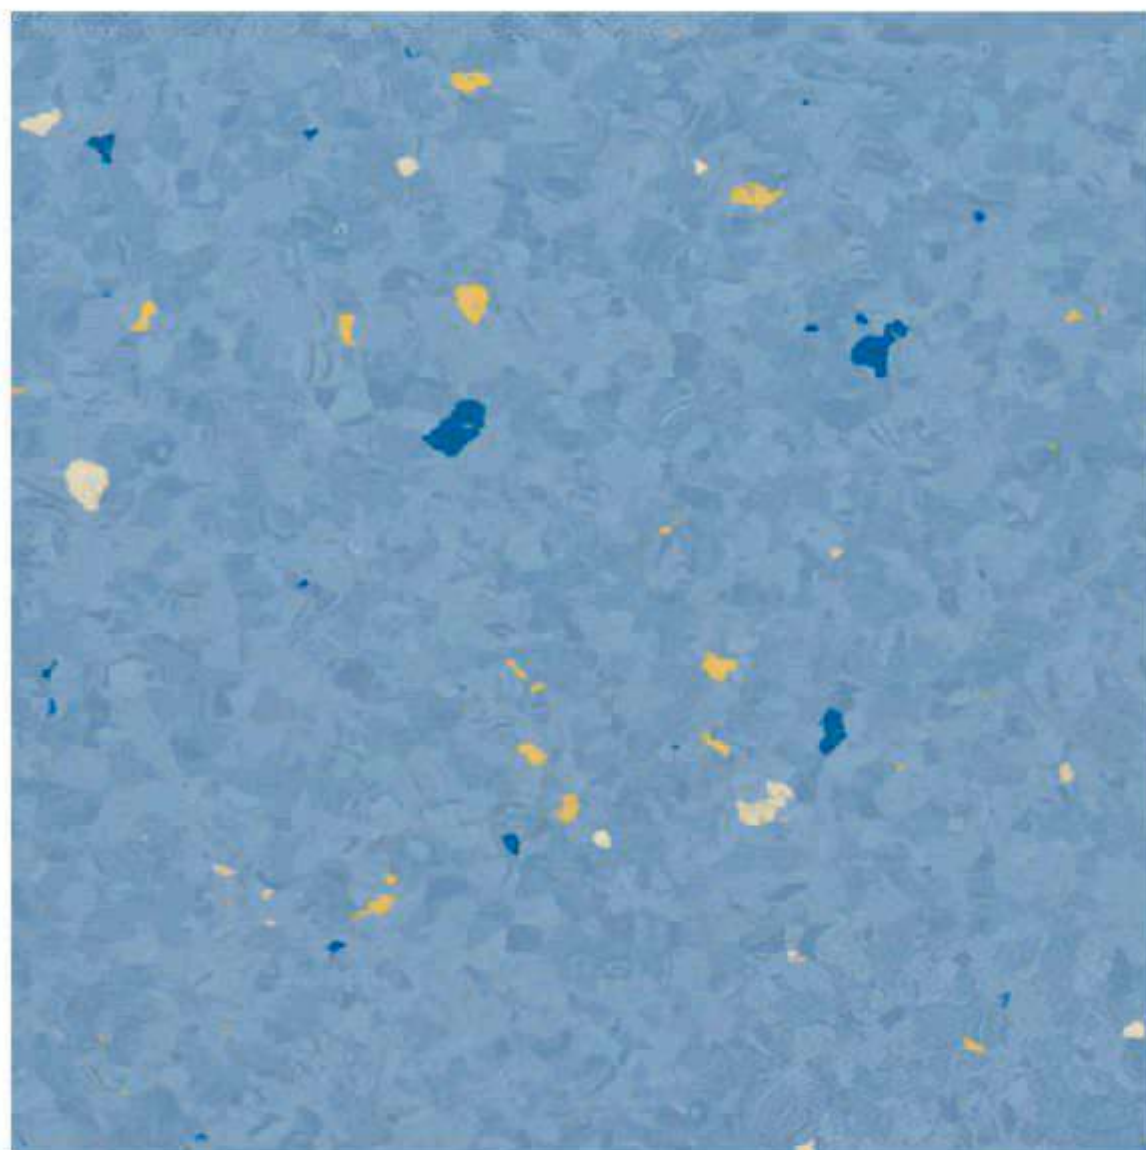


Azul 3570



Celeste 3520



Azurite 3510




Grigio 3410



Alpi 3620




Titanio 3600




Bianco 3480




Corallo 3460



Ametista 3500



Giallo 3580



Ambra 3440



Beola 3560

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with three non-tonal highlight chips.

Conforms to EN 649 / EN ISO 10581.



100% RECYCLABLE
25% RECYCLED MATERIAL

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 300 x 300mm, 608 x 608mm


It is recommended that a larger sample piece is viewed to appreciate the decoration.

Classic Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT




Delta Blue 1220



Coral Drift 1250




Cornbrook 1240



Wild Mint 1230



Cloudburst 1210



Sunblaze 1260



Satinwood 1370



Silver Mist 1430



Shoreline 1460



Quartz 1400



Asparagus 1320



Pale Slate 1200



Ladoga 1410



Smokestone 1160



Mountain Lake 1330



Nocturne 1380

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with marbleised tonal highlight chips.


Conforms to EN 649 / EN ISO 10581.



* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 300 x 300mm, 608 x 608mm

2000 PUR

HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE REINFORCEMENT



Saffron 8490



Dawn Mist 8800



Lace Blue 8500*



Oak 8300*




Wild Lilac 8650



Blossom 8900



Stream 8050



Buckwheat 8850*




Stonewall 8230*



Sapphire 8550




Thistle 8600



Sequoia 8400




Brushed Ochre 8000




Rosehip 8950



Larkspur 8350*




Glacier Blue 8450



Mint Crest 8700



Willowbank 8380*



Glenbeck 8750



Shadow 8150

KEY FEATURES

Hardwearing, homogeneous commercial floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Directional duotone marbled decoration with marbled highlight tones.

Conforms to EN 649 / EN ISO 10581.



100% RECYCLABLE
25% RECYCLED MATERIAL



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.0mm, 2.5mm

AVAILABILITY: Sheet (2.0mm, 2.5mm)

Tile: 300 x 300mm (2.0mm, 2.5mm),
608 x 608mm (2.0mm)

All colours are available ex-stock in 2.0mm.
*6 colours are available ex-stock in 2.5mm.



Turquoise 3810*



Carnelian Beige 3890



Rose Quartz 3870*



Porcelain 3880



Pumice 3700*



Citrine 3930



Fossil 3710*



Dolomite 3910*



Flint 3720*



Connemara Green 3800



Blue Nickel 3730



Tanzanite Blue 3750



Azure 3770



Sablee Beige 3900*



Jade 3830



Crystal Blue 3740*



Blue Zircon 3760*



Ironstone 3850

All colours are available ex-stock in 2.0mm.

* 9 colours are available ex-stock in 1.5mm.

KEY FEATURES

Hardwearing, homogeneous commercial floorcovering.

Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Directional duotone marbleised decoration.

Conforms to EN 649 / EN ISO 10581.




100% RECYCLABLE
25% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS

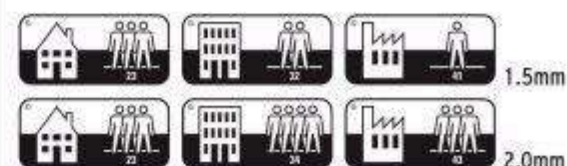


GAUGE: 1.5mm, 2.0mm

AVAILABILITY: Sheet (1.5mm, 2.0mm)

Tile: 300 x 300mm (2.0mm), 608 x 608mm (2.0mm)

Standard XL

HEAVY-DUTY VINYL FLOORING WITH A MARBLEISED DECORATION

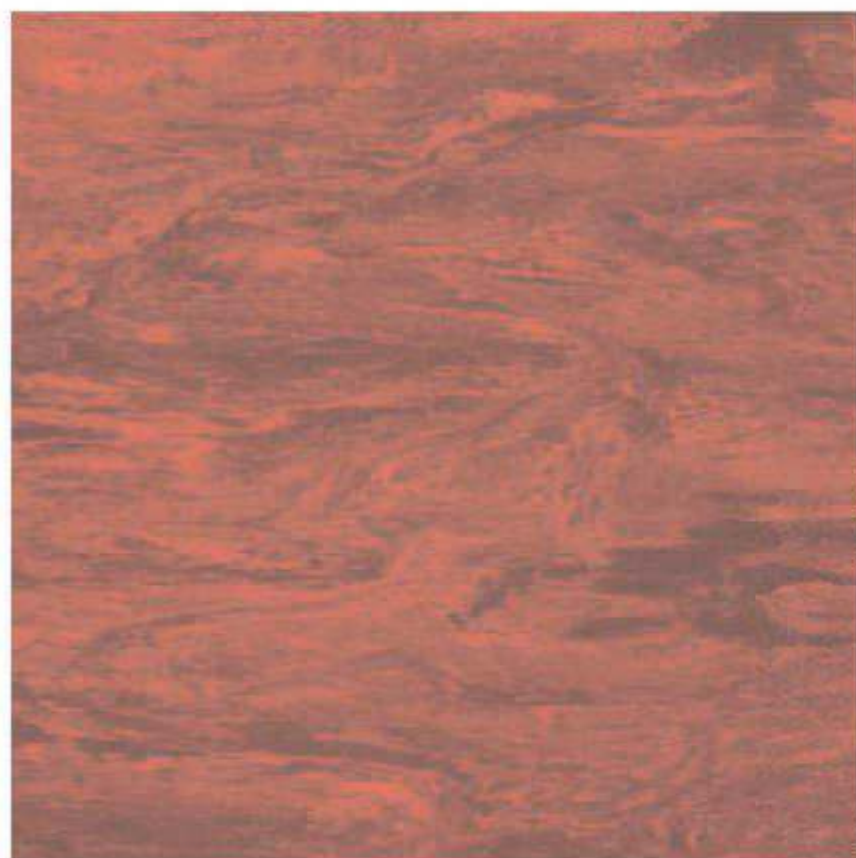


Black Cherry 8580



Atlantic Blue 9170



Black Panther 8640*

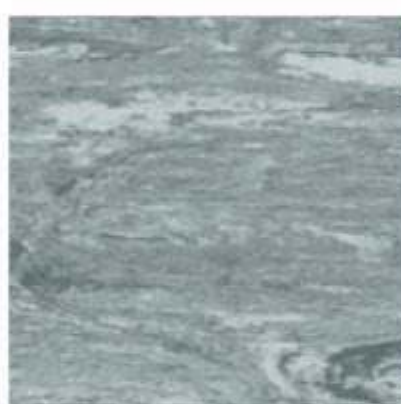

Graphite 9120*



Slate Grey 9200*✓




Mushroom 9110*✓

All colours are available ex-stock in 2.0mm.
 • 4 colours are available ex-stock in 1.5mm.
 ✓ 2 colours are available ex-stock in 2.5mm and 3.0mm.

KEY FEATURES

Hardwearing, homogeneous commercial floorcovering, in a choice of gauges.
 Directional duotone marbled decoration.
 Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS

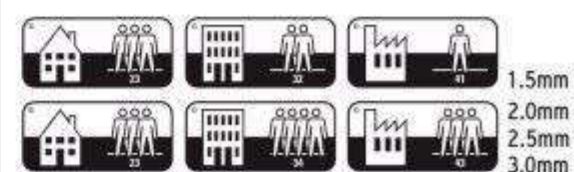

GAUGE: 1.5mm, 2.0mm, 2.5mm, 3.0mm

AVAILABILITY: Sheet (1.5mm, 2.0mm, 2.5mm, 3.0mm)

Tile: 300 x 300mm (2.0mm)

608 x 608mm (2.0mm)



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SEMI-FLEXIBLE TILES

Polyflex Plus PU

ECONOMICAL, GENERAL-PURPOSE VINYL TILE FEATURING
A POLYURETHANE SURFACE TREATMENT



Arran Beige 7420



Dover Grey 7330*



Border Grey 7110




Lomond Grey 7320

TRADITIONAL



Snowdrop 6010



Pearl Grey 6130



Magnolia 6060*



Avon Sand 7080



Durham Fawn 7400*



Wensley Beige 7390



Mendip Mauve 7360



Mourne Grey 7310*



Walnut 6180*



Jersey Tan 7410*



Brecon Beige 7040*



Romney Green 7340



Pennine Fawn 7030



Firth Grey 7060*



Dark Brown 6300



Cambrian Bronze 7100



Cornish Cream 7370*




Cotswold Green 7010*



Anglian Red 7380*



Lakeland Blue 7350*



Black Tulip 6040

All colours are available ex-stock in 2.0mm. *12 colours are also available ex-stock in 1.5mm and 2.5mm.

KEY FEATURES

General-purpose, homogeneous vinyl tile.

Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10581.

Available in traditional or duotone marbling.

Traditional marbling colours include a secondary complimentary colour.




100% RECYCLABLE
25% RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk




SPECIFICATIONS

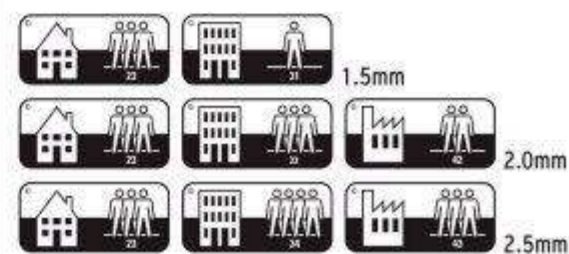


GAUGE: 1.5mm, 2.0mm, 2.5mm
AVAILABILITY: Tile: 300 x 300mm

Polysafe Corona PUR

HEAVY-DUTY SAFETY FLOORING WITH A MULTI-CHIP DECORATION

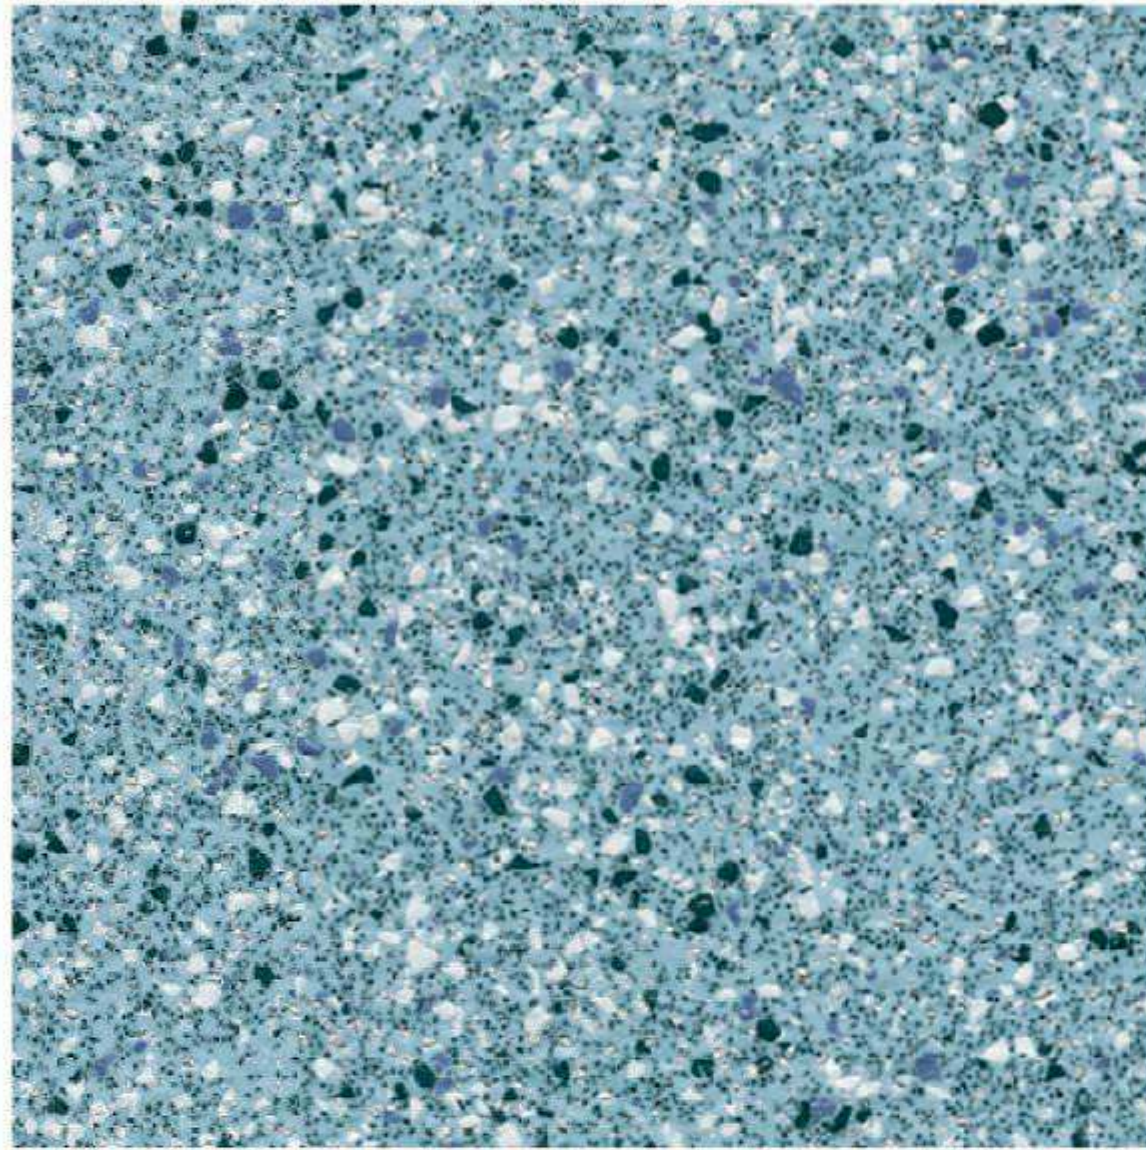


Geyser 5580




Grasshopper 5540




Seal 5570




Pacific 5550




Otter 5530




Bluebell 5510




Blackbird 5560




Seawater 5490




Drystone 5470



Barley 5500



Mango 5480



Tulip 5520

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm


AVAILABILITY: Sheet

Polysafe Astral PUR


HEAVY-DUTY SAFETY FLOORING WITH MULTI-FLAKE DECORATION

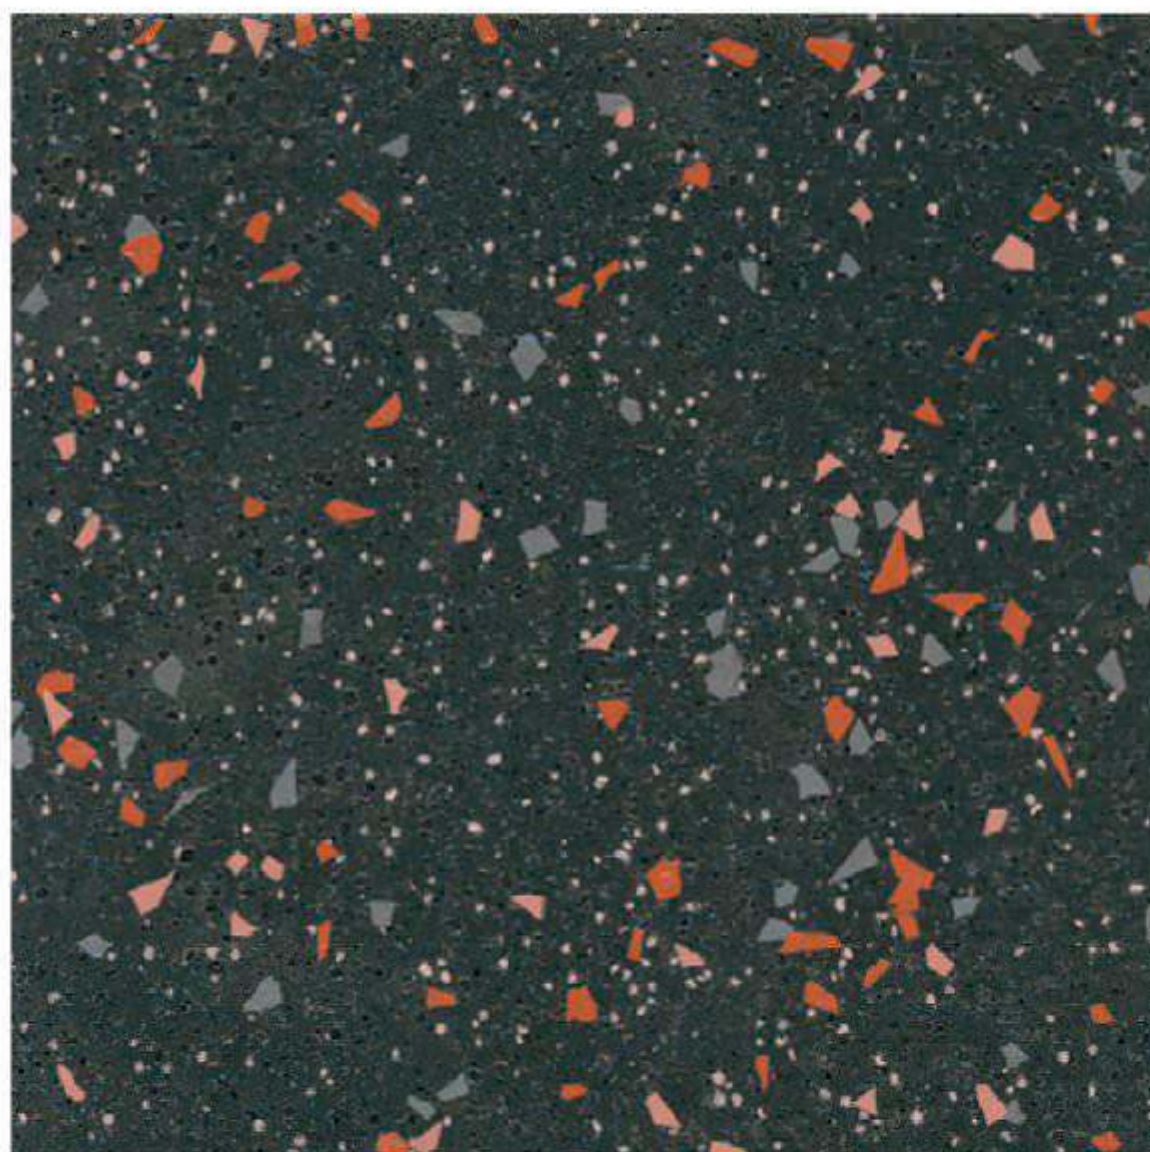


Lunar Grey 4240



Space Mauve 4230




Sunspot 4410




Orion Beige 4280




North Star 4370




Solstice 4260




Isis 4380



Vega Green 4270




Aquarius 4220




Polaris 4250




Nebula Blue 4200



Sculptor 4400



Red Sky 4310



Starburst 4300

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Polysafe Mosaic PUR

HEAVY-DUTY SAFETY FLOORING WITH HIGH DENSITY FLAKE DECORATION AND PEARLESCENT



Pearlite 4115

NCS S 2005-G70Y
WR 4115

Earthstone 4155

NCS S 3010-Y40R
WR 4155


Akoya 4125

NCS S 3010-Y20R
WR 4125

Orient Grey 4135

NCS S 5500-N
WR 4135


Green Opal 4195

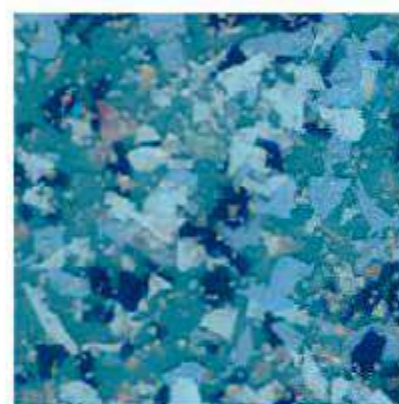NCS S 4010-G10Y
WR 4195

Freshwater 4145

NCS S 4020-B10G
WR 4145

Grey Fusion 4105

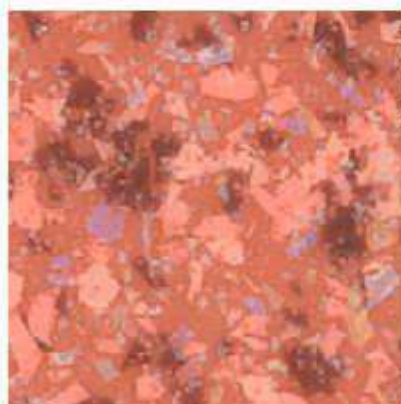NCS S 3502-Y
WR 4105

Sunstone 4185

NCS S 3030-Y70R
WR 4185

South Sea 4175

NCS S 5020-P90B
WR 4175

Graphite Pearl 4165

NCS S 6500-N
WR 4165

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates aluminium oxide and coloured quartz particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet

It is recommended that a larger piece is viewed at floor level to appreciate the decoration

Polysafe Modena PUR


HEAVY-DUTY SAFETY FLOORING FEATURING CLEAR MICRO-GRANITE DESIGNS

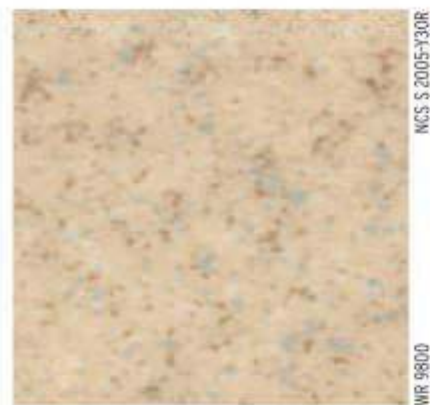


Gypsum 4044




Copal 4046

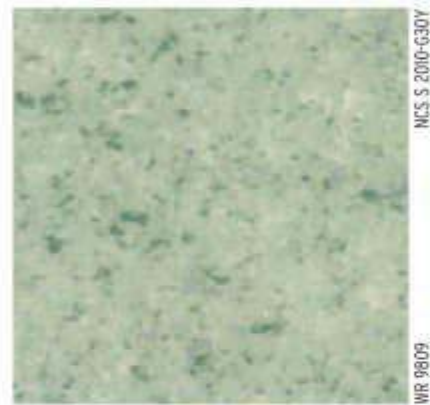

Aventurine 4055

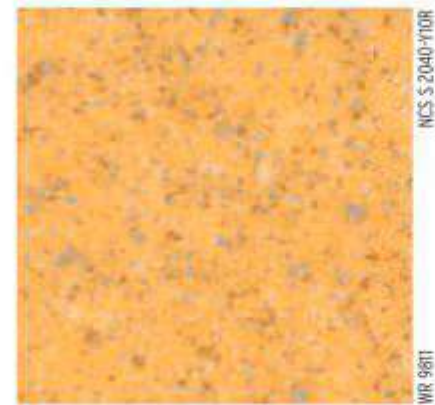


Citrina 4048

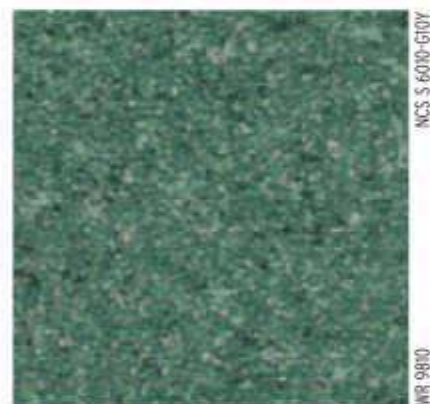

Green Tourmaline 4052



Orange Calcite 4053

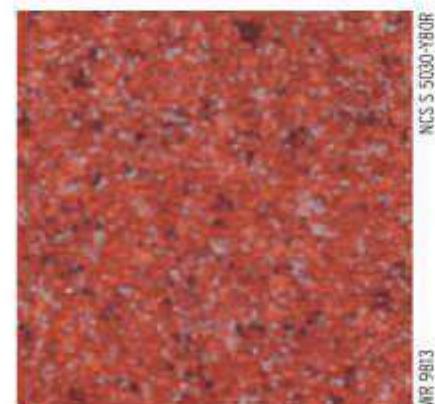

Garnet 4056



KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity micro granite designs.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).


Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE

CONTAINS RECYCLED MATERIAL


† Refer to BRE Global ratings on www.thegreenguide.org.uk

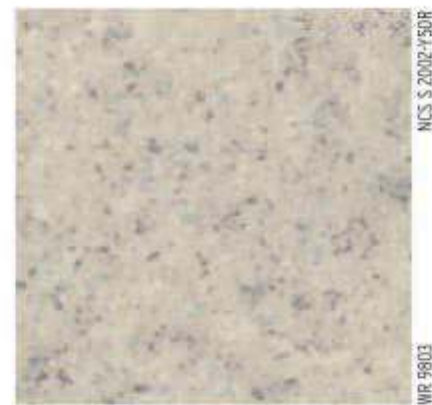

Grey Fluorite 4042




Agate Grey 4043

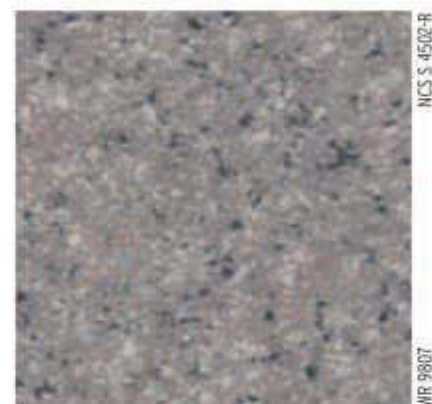

Galena 4047



Andesite 4049

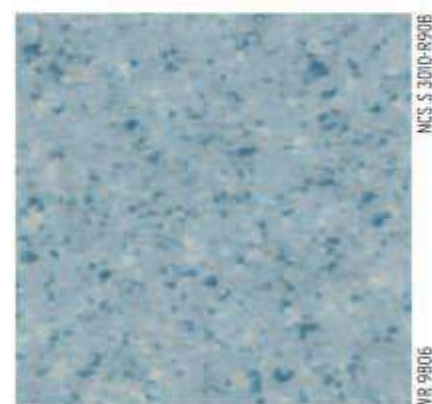

Angelite 4051



Jetstone 4045



Blue Quartz 4054

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Arena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING ABSTRACT, MATERIAL AND STONE DESIGNS



Linen 5081



Crema Nova 5090



Steelwool 5082



Clay Stone 5092



Chambray 5083



Flagstone Grey 5091



KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity abstract, stone and material effects.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE

CONTAINS RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk



Sand Grain 5085



Dark Concrete 5089



Brushed Titanium 5086



Cement 5088



Frosted Silver 5084



Light Concrete 5087

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Wood fx PUR


HEAVY-DUTY SAFETY FLOORING FEATURING SOPHISTICATED WOOD DESIGNS



Silver Oak 3357



Classic Oak 3107 WIDE PLANK DESIGN

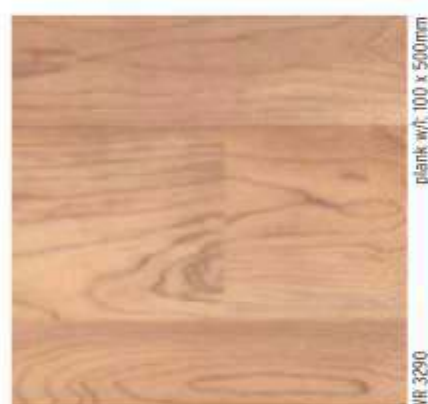

Vermont Maple 3097



Warm Beech 3297



American Oak 3387



Rustic Oak 3337



Cherry 3307



European Oak 3347



Mahogany 3367



Brazilian Walnut 3997

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety floorcovering featuring authentic and contemporary wood designs. Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.
≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Polysafe Vogue Ultra PUR


HEAVY-DUTY, DECORATIVE SAFETY FLOORING WITH MULTI-CHIP DESIGN

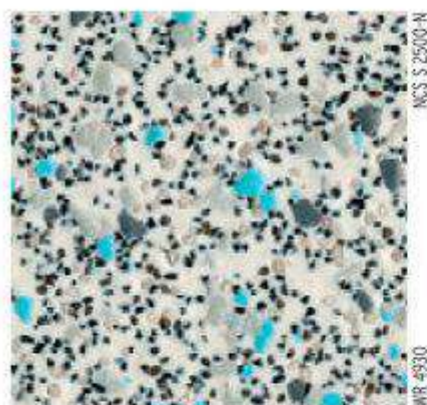


Snowstorm 4835

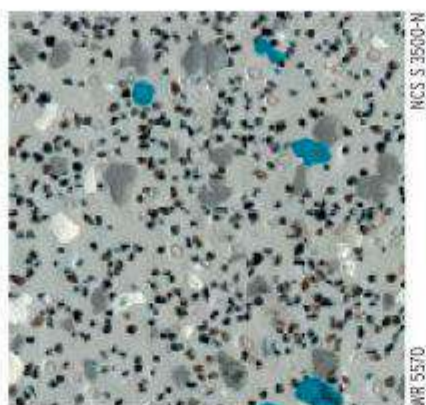


Whirlpool 4805

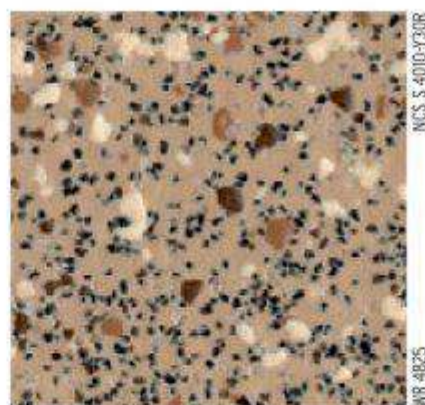


Toffee 4825

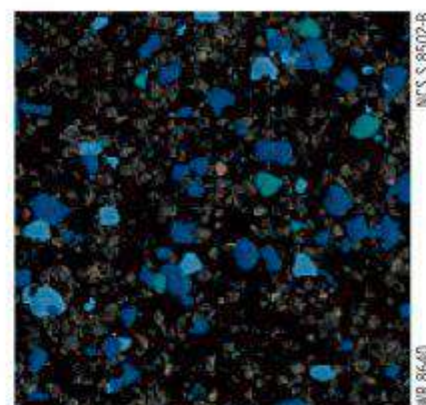


Galactic 4815

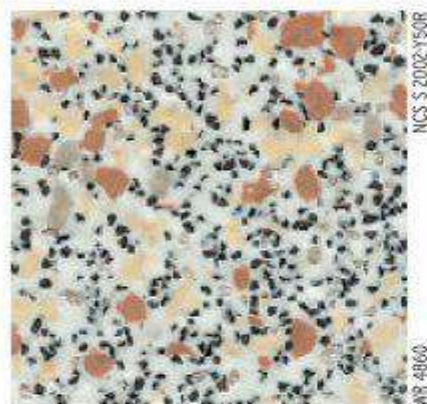


Bisque 4860

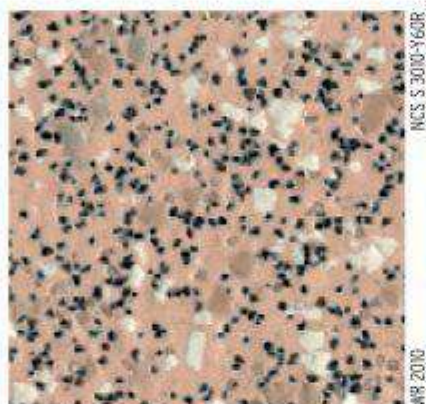


Oystershell 4800

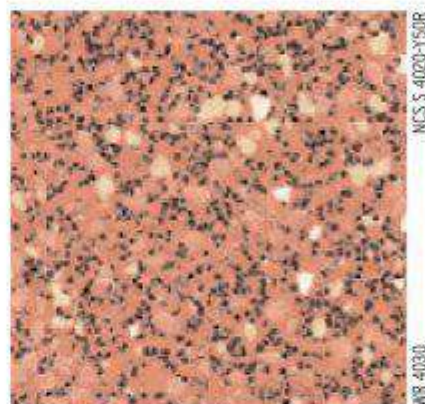


Dune 4690

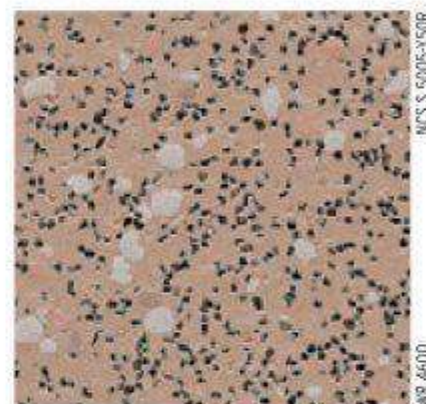


Meadow 4810

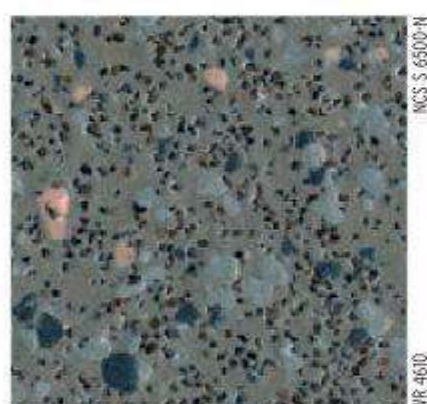

Nightsky 4760

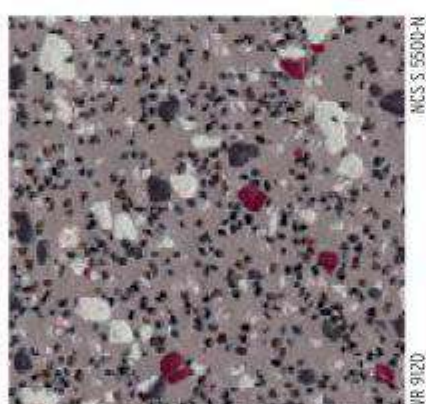


Winter Dusk 4730

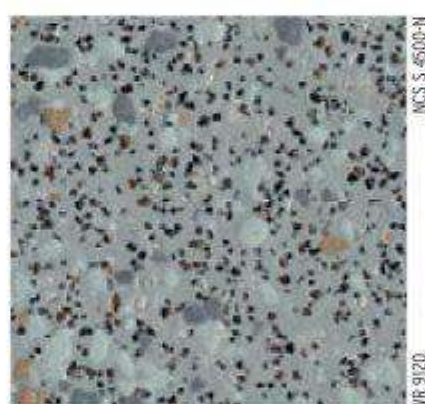


Woodland Grey 4770




Firestar 4790

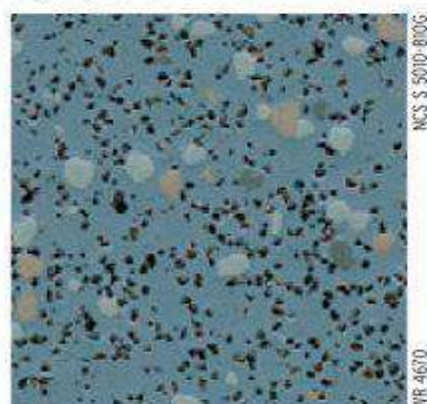


Moonbeam 4780

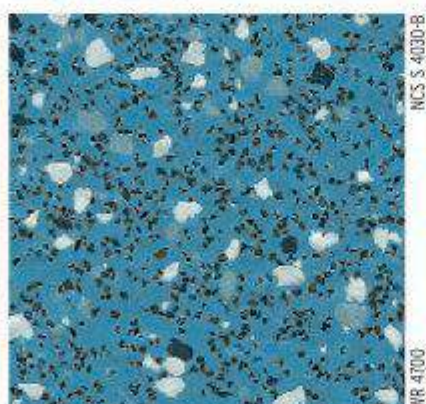

Marine 4870

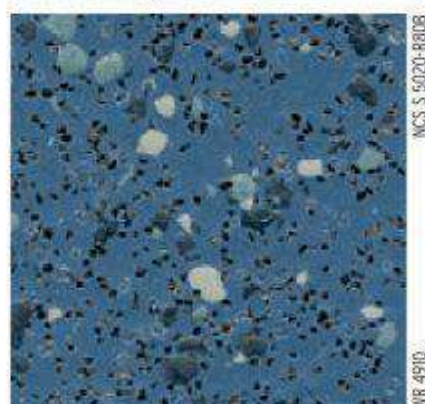

Steel Blue 4740

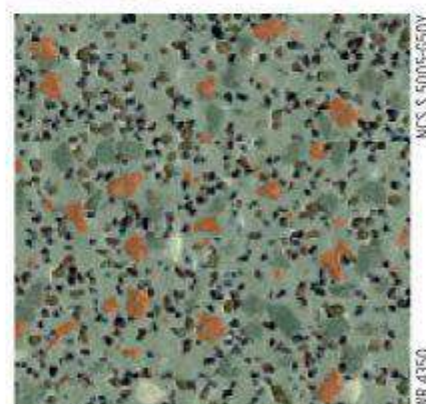

Forest Pine 4500

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.
≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet

Polysafe Standard PUR


HEAVY-DUTY SAFETY FLOORING WITH A TRADITIONAL DECORATION




Cedar Blue 4060*




Ash Grey 4540




Cool Aqua 4570




Silver Birch 4020*




Arctic Blue 4130




Nordic Grey 4090




Lilac Blue 4580




Alpine Green 4110




Storm Blue 4560




Elmwood 4520




Autumn Beige 4140




Maple Fawn 4030*




Antique Copper 4120



Twilight 4490



Black Walnut 4150



Redwood 4040*

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.
≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm, 3.5mm*

AVAILABILITY: Sheet


* 4 colours are available ex-stock in 3.5mm.

Polysafe Strata


HEAVY-DUTY SAFETY FLOORING WITH A MULTI-FLAKE DECORATION

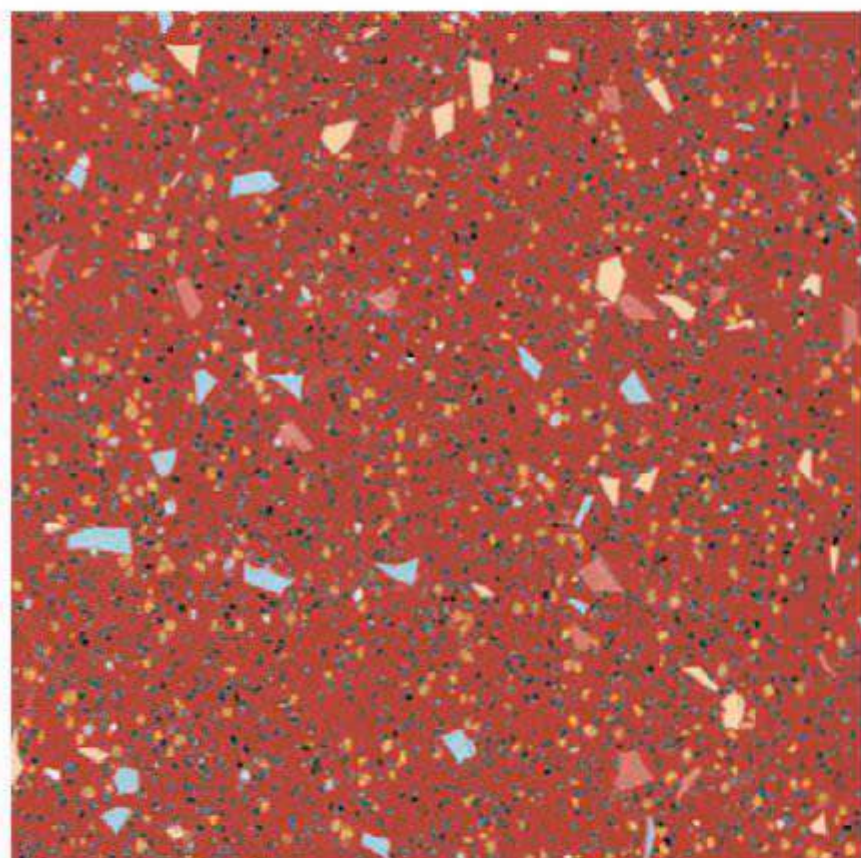


Marlstone 4630

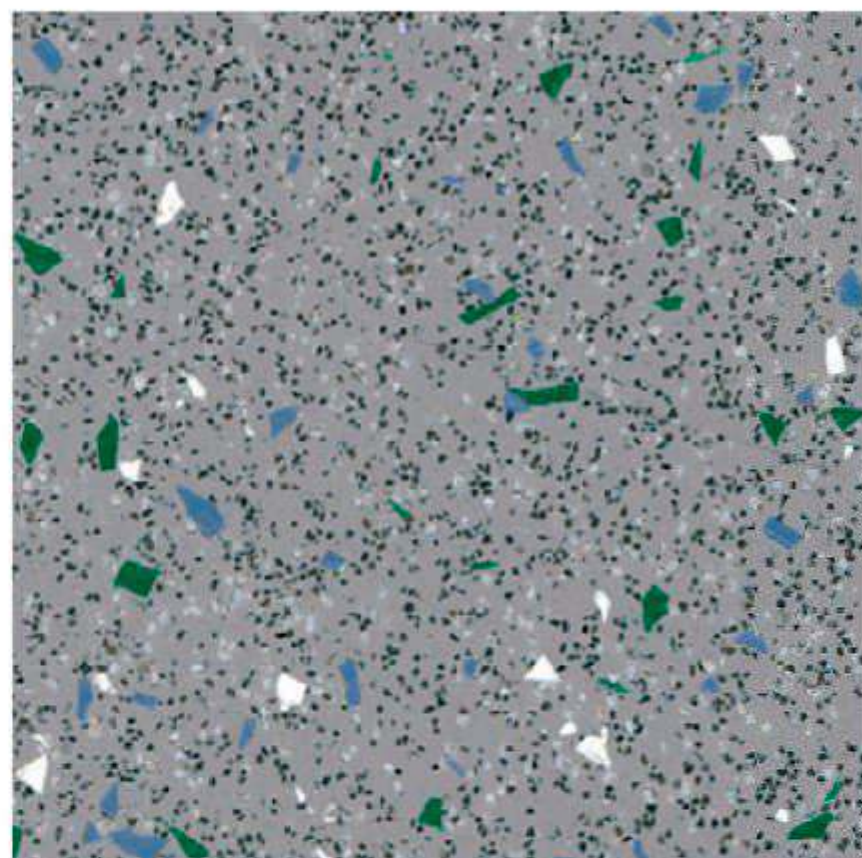


Bedrock 4170

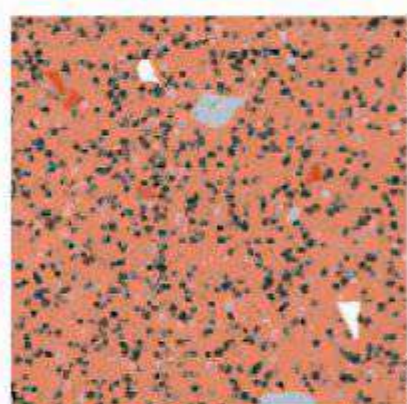


Elvan Fawn 4180

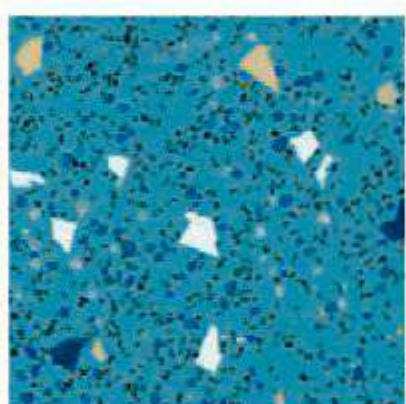


Calcite Blue 4460

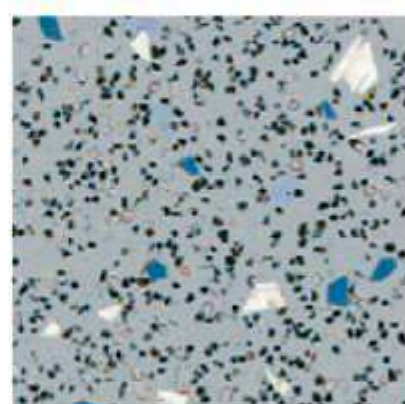


Feldspar 4620

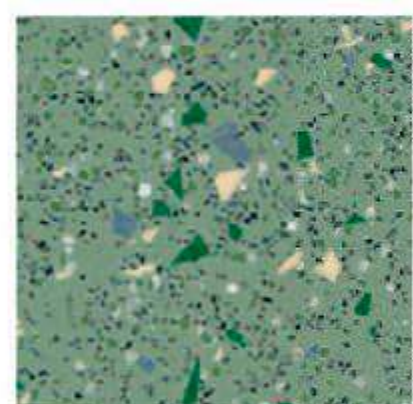


Greenstone 4440

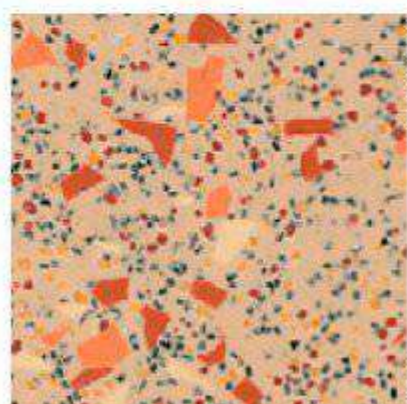

Arkose 4190

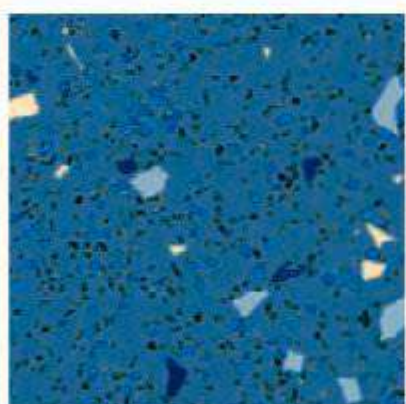

Deep Sapphire 4050

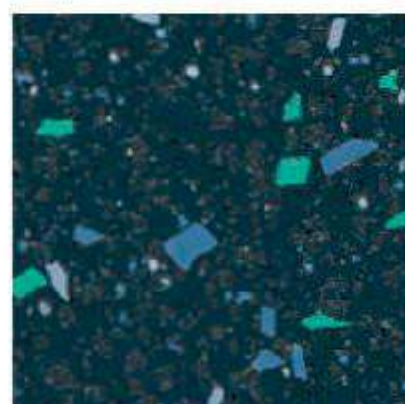

Black Opal 4080

KEY FEATURES

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.
 ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS





GAUGE: 2.0mm


AVAILABILITY: Sheet

Polysafe Ultima


SAFETY FLOORING WITH A MULTI-CHIP DECORATION. DESIGNED FOR HEAVY USE AREAS WHICH REQUIRE ENHANCED SLIP RESISTANCE

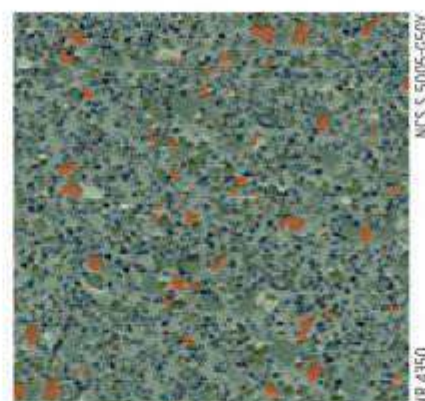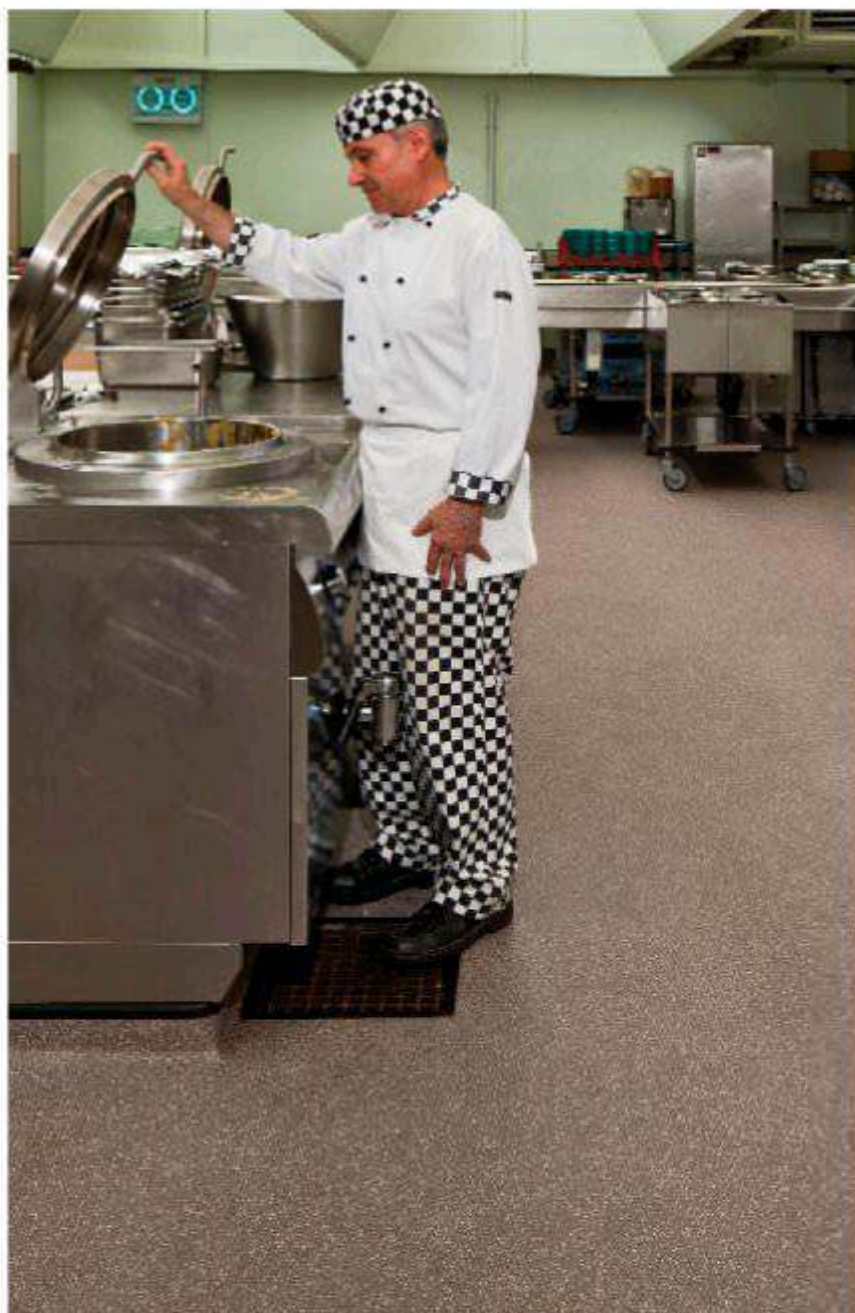

Baltic Green 4350

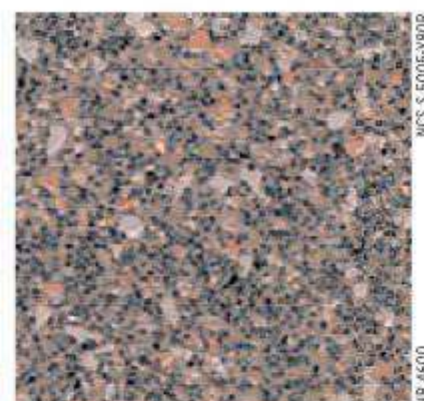


Mortar 4360

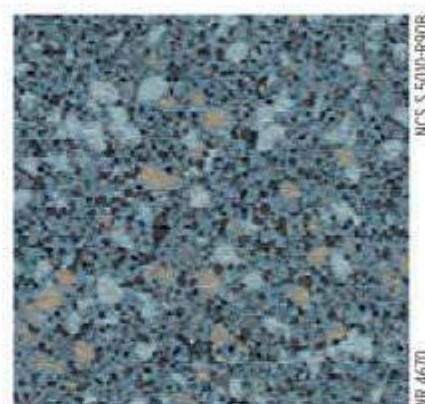


Pearl Granite 4330



Aurora Grey 4290

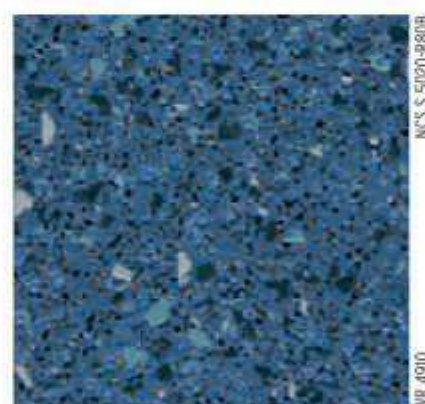

Bluestone 4390

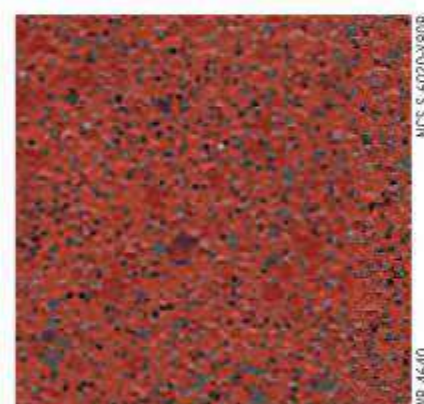

Iron Ore 4340

KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.

Ideal for high footfall areas, such as food preparation areas or busy commercial kitchens, with risks of oil and grease spillages. Can also be used in continually wet and barefoot areas.

Slip resistance is assured for the guaranteed life of the product. ≥ 40 (Pendulum wet test - 4S Rubber) and ≥ 36 (TRL Rubber) with a surface roughness of $R_z \geq 70\mu m$.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.5mm

AVAILABILITY: Sheet

Polysafe Wood fx Acoustix PUR

HEAVY-DUTY SAFETY FLOORING WITH ACOUSTIC PROPERTIES, FEATURING SOPHISTICATED WOOD DESIGNS



Brazilian Walnut 3992



Silver Oak 3352



Mahogany 3362



Cherry 3302



Warm Beech 3292



American Oak 3382



Rustic Oak 3332



European Oak 3342

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety floorcovering featuring authentic and contemporary wood designs.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

≥19dB impact sound reduction level to exceed Building Regulation Part E requirements.

Ergonomically designed for anti-fatigue benefits. Conforms to EN 651/EN ISO 11368.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


SPECIFICATIONS




GAUGE: 3.7mm, wear layer 0.65mm

AVAILABILITY: Sheet


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

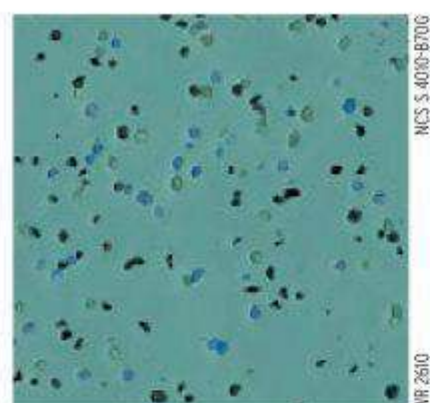


Apple Mint 4628

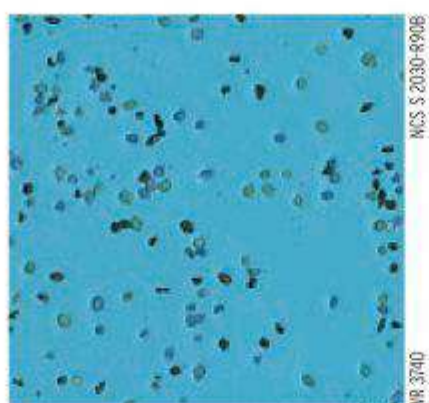


Chicory 4625

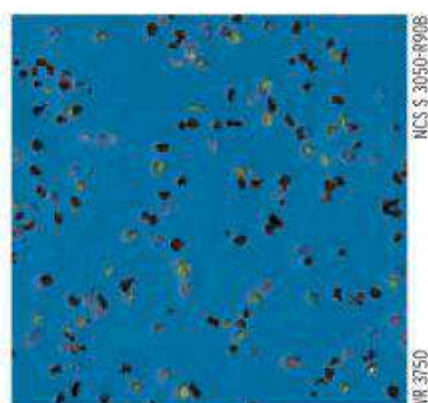


Starflower 4627

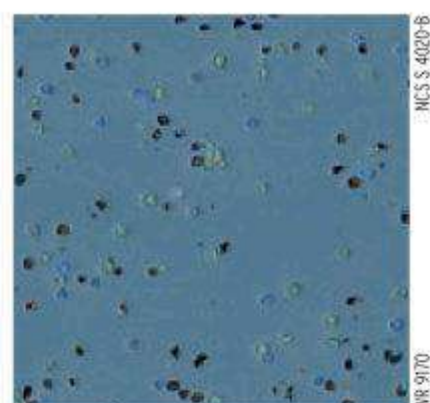


Tuscan Blue 4626

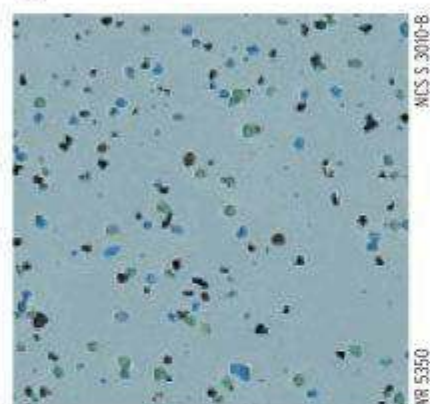


Iris 4629

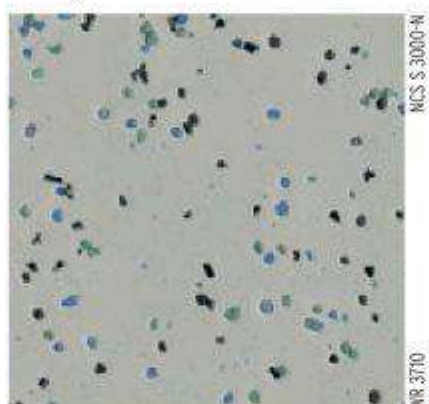


Santolina 4631

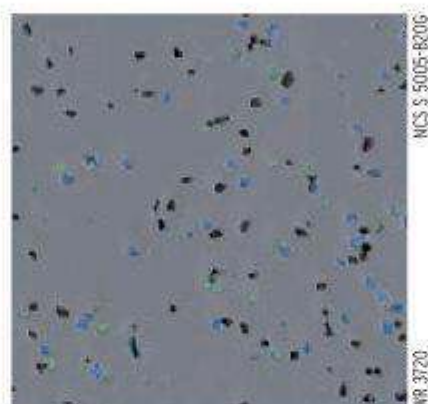


Anise Grey 4632

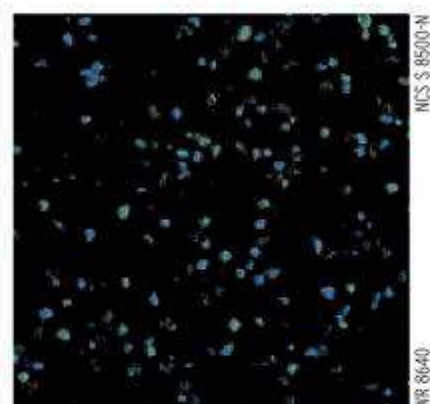


Blackseed 4633

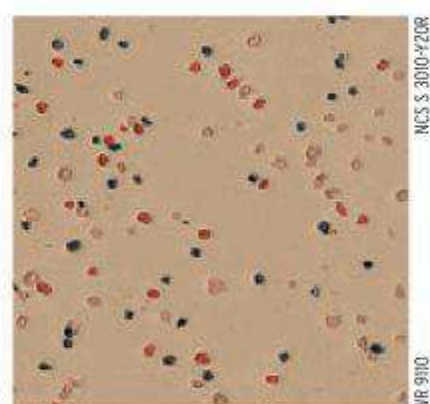


Allspice 4622

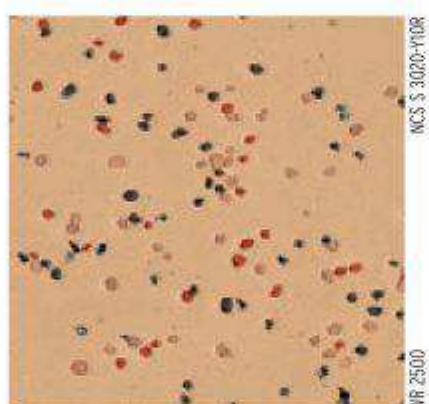

Cassia 4621

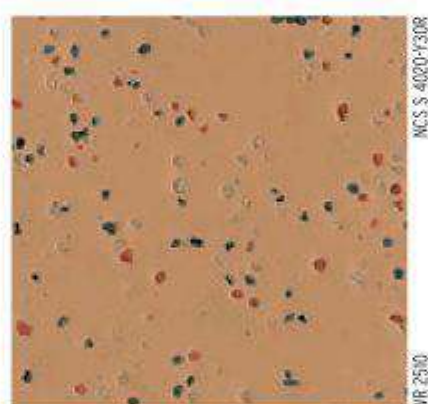

Caraway 4623

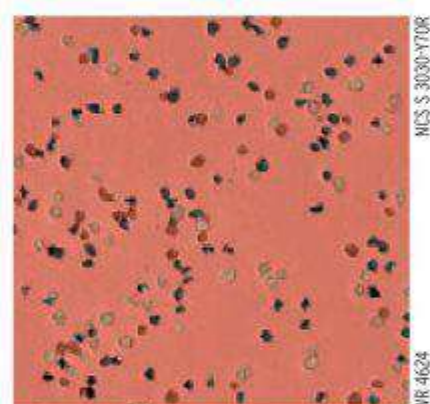

Mace 4624

KEY FEATURES

Incorporates complementary coloured quartz and silicon carbide particles, to improve traction and safety underfoot.

All the Polyflor XL hallmarks, now engineered as a safety range.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).



100% RECYCLABLE
25% RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Forest fx PUR

HARDWEARING COMMERCIAL WOOD EFFECT SHEET VINYL FLOORCOVERING



Vermont Maple 3090



Warm Beech 3290



American Oak 3380



Oiled Oak 2990 WIDE PLANK DESIGN



Rustic Oak 3330



European Oak 3340



Rich Cherry 3310



Classic Oak 3100 WIDE PLANK DESIGN




Stained Maple 3110



Smoked Oak 3150 WIDE PLANK DESIGN



Classic Walnut 3230 WIDE PLANK DESIGN

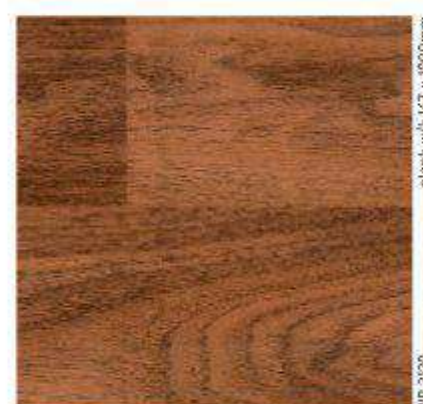

French Walnut 3120 WIDE PLANK DESIGN



Mahogany 3360



Brazilian Walnut 3990

KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering.

Highly realistic wood designs in a choice of 14 shades.

Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
10% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Acoustix Forest fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



Rustic Oak 3335

plank w/t: 84 x 332/664mm
WR 3330



Oiled Oak 3095

plank w/t: 167 x 1500mm
WR 2990



Warm Beech 3295

plank w/t: 100 x 500mm
WR 3290



American Oak 3385

plank w/t: 100 x 1000mm
WR 3380



Classic Oak 3125

plank w/t: 167 x 1500mm
WR 3330



Smoked Oak 3155

plank w/t: 167 x 1500mm
WR 3150



European Oak 3345

plank w/t: 100 x 1000mm
WR 3340



Classic Walnut 3235

plank w/t: 167 x 1000mm
WR 3230

KEY FEATURES

Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.

Choice of highly realistic and popular wood designs.

Polyurethane reinforcement to facilitate a lifelong, low-cost, polish-free maintenance regime.

Conforms to EN 651.

SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.65mm

AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



100% RECYCLABLE
10% RECYCLED MATERIAL

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



Acoustix Gallery fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT NOISE SOUND REDUCTION OF 19dB



Vermont Maple 6837



Mercury 6840




Zinc 6841



Onyx 6842



American Oak 6815

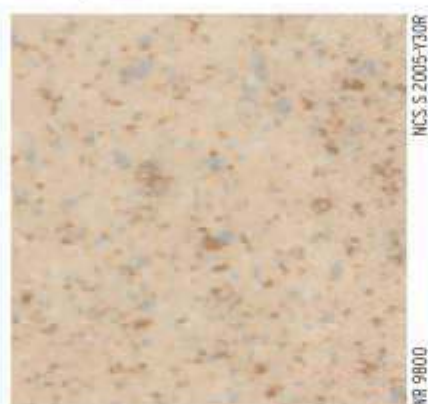

Silica Sand 6843




Mica Sand 6844




Earth 6845



Rustic Oak 6836

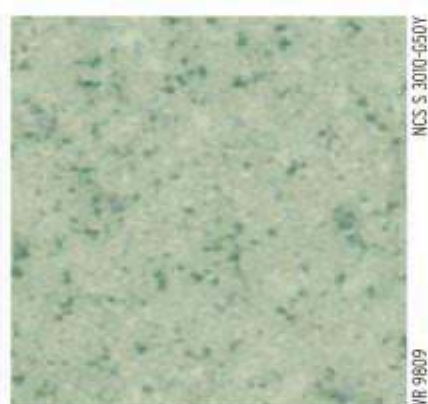

Euclase Green 6846

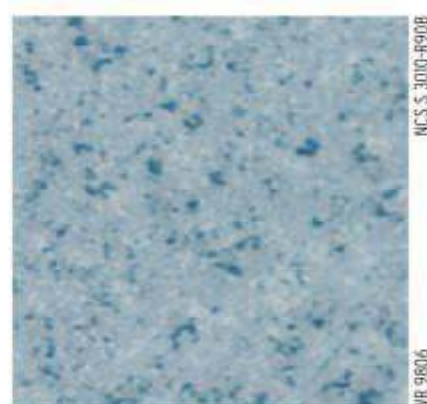

Celestine Blue 6847



Lazulite Blue 6848



European Oak 6835



Stained Maple 6838

KEY FEATURES

Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.

Choice of highly realistic wood and micro-granite designs.

Polyurethane reinforcement to facilitate a lifelong, low-cost polish-free maintenance regime

Conforms to EN 651.



100% RECYCLABLE
10% RECYCLED MATERIAL

⁹ Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.6mm

AVAILABILITY: Sheet

This range includes highly realistic replications of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.

Secura PUR

HARDWEARING DOMESTIC AND LIGHT COMMERCIAL LUXURY VINYL SHEET



Natural Oak 2126
1000 x 200mm



Alabaster Elm 2123
1000 X 166mm



Aspen 2124
1000 x 100mm



Norwegian Maple 2125
1000 x 80mm



Blond Oak 2127
1500 x 200mm




Golden Oak 2128
1000/500 x 62.5mm



Antique Herringbone 2129
710 x 140mm




Country Oak 2130
1500 x 200mm

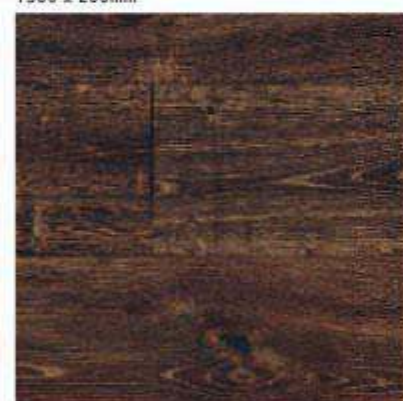


Antique Oak 2131
1500 x 200mm



Sweet Chestnut 2132
1000 x 100mm

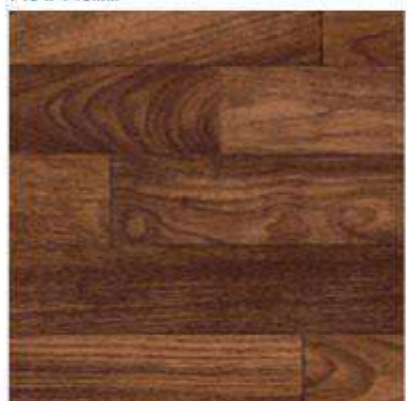

Black Walnut 2133
580/420 x 100mm

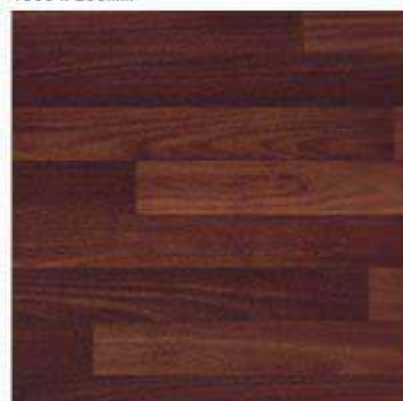

African Mahogany 2134
1000/500 x 62.5mm



Ebony 2135
1000 x 100/150mm

KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 653 / EN ISO 26986.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



Yorkstone 2110
500 x 333mm



Limestone 2111
500 x 333mm



Black Slate 2114
500 x 333mm



Peakmoor Sandstone 2112
235 x 235mm



Farmhouse Terracotta 2113
165 x 165mm



Riviera Sands 2115



Riviera Taupe 2116



Riviera Bluebell 2117



Polished Concrete 2118



Grey Flagstone 2119
400 x 375mm



Linear Ivory 2120



Linear Fawn 2121



Linear Charcoal 2122

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.



GAUGE: 3.0mm, wear layer 0.35mm

AVAILABILITY: Sheet



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR

ELEGANT WOOD COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



Beige Weathered Spruce 4074
203 x 1219mm



American Oak 4059
152 x 914mm



Light Classic Oak 4085
152 x 1219mm



Honey Classic Oak 4086
152 x 1219mm



Classic Oak 1902
101 x 914mm



Nut Tree 1907
101 x 914mm



Vintage Timber 4091
101 x 914mm



Light Pine 4061
152 x 1219mm



Honey Ash 4022
152 x 1219mm



Grey Ash 4020
152 x 1219mm



Beige Varnished Wood 4069
152 x 1219mm



Light Varnished Wood 4071
152 x 1219mm



Blue Varnished Wood 4070
152 x 1219mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.
Sophisticated and extensive collection with realistic emboss finishes.
Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
Indoor Air Comfort GOLD - Eurofins certified product.
Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



Blond Limed Oak 4081
203 x 1219mm



Grey Limed Oak 4082
203 x 1219mm



Grey Pine 4063
152 x 1219mm



Brown Heritage Cherry 4065
184 x 1219mm



Dark Classic Oak 4088
152 x 1219mm



Brown Weathered Spruce 4072
203 x 1219mm



Red Heritage Cherry 4066
184 x 1219mm



Indian Ebony 1969
101 x 914mm



Blue Weathered Spruce 4073
203 x 1219mm




Brown Limed Oak 4084
203 x 1219mm



Dark Limed Oak 4083
203 x 1219mm



Graphite Pine 4062
152 x 1219mm

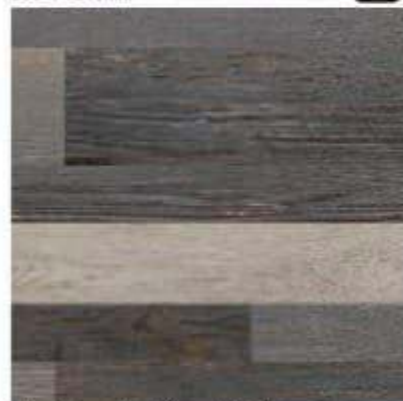

Blue Recycled Wood 4068
Mixed sizes



Dark Recycled Wood 4067
Mixed sizes



Weathered Country Plank 4019
152 x 914mm



Aged Elm 4036
152 x 914mm



4067 and 4068 feature mixed plank sizes: 76 x 914, 101 x 914, 152 x 914mm.

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.55mm

AVAILABILITY: Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR

AUTHENTIC STONE AND EFFECTS COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



Crème Swirl 5048
457 x 457mm



Beige Travertine 5061
305 x 610mm




Classic Yorkstone 1992
457 x 457mm



Light Grey Travertine 5062
305 x 610mm



Exposed Concrete 5028
457 x 457mm

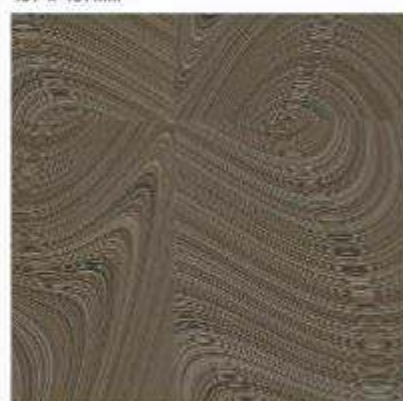

Green Swirl 5047
457 x 457mm



Birch Trunk 4077
305 x 914mm



Dark Grey Travertine 5063
305 x 610mm



Cambrian Stone 1993
457 x 457mm



Grey Plywood 4075
305 x 914mm



Brown Plywood 4076
305 x 914mm



Silver Slate 1921
457 x 457mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.
Sophisticated and extensive collection with realistic emboss finishes.
Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
Indoor Air Comfort GOLD - Eurofins certified product.
Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



Light Grey Concrete 5067
610 x 610mm



Cool Grey Concrete 5068
610 x 610mm



Warm Grey Concrete 5064
610 x 610mm



Dark Grey Concrete 5069
610 x 610mm



Beige Brazilian Slate 5041
610 x 610mm



White Brazilian Slate 5042
610 x 610mm



Gold Brazilian Slate 5043
610 x 610mm



Taupe Brazilian Slate 5044
610 x 610mm



Crème Matrix 5076
610 x 610mm



Light Grey Matrix 5074
610 x 610mm



Mocca Matrix 5075
610 x 610mm



Black Matrix 5071
610 x 610mm



Nature Textile 5078
610 x 610mm



Black Textile 5077
610 x 610mm

SPECIFICATIONS

The **R10** value shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



GAUGE: 2.5mm, wear layer 0.55mm

AVAILABILITY: Tile: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Design PUR

ELEGANT WOOD AND AUTHENTIC STONE AND EFFECTS COLLECTION FOR VERY HEAVY COMMERCIAL APPLICATIONS



KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.
Sophisticated and extensive collection with realistic emboss finishes.
Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
Indoor Air Comfort GOLD - Eurofins certified product.
Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



Classic Limestone 7173
305 x 610mm



Roman Limestone 7219
305 x 610mm



Crème Matrix 8077
610 x 610mm



Warm Grey Concrete 7233
610 x 610mm




Cool Grey Concrete 7237
610 x 610mm



Light Contour 7214
305 x 914mm




Dark Grey Concrete 7238
610 x 610mm

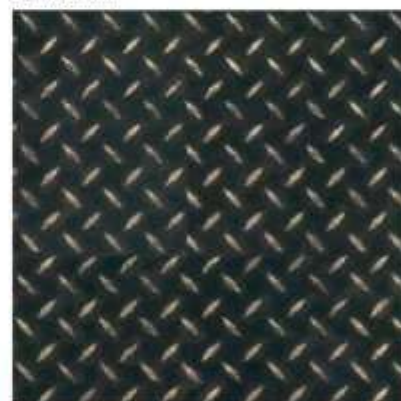

Black Treadplate 8122
457 x 914mm



Mocca Matrix 8076
610 x 610mm

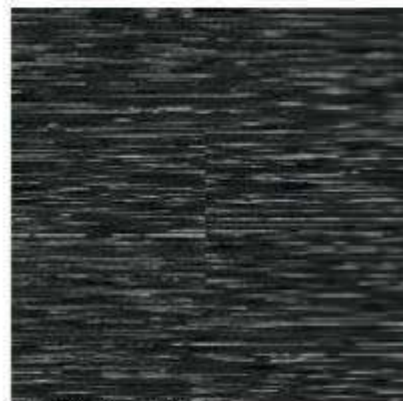

Dark Contour 7215
305 x 914mm



Silver Slate 7155
305 x 610mm



Atlantic Slate 7154
305 x 610mm



Black Slate 7153
305 x 610mm

SPECIFICATIONS

The **R** value shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 3.0mm, wear layer 0.7mm

AVAILABILITY: Tile: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Control PUR

LUXURY VINYL TILES WITH SUSTAINABLE WET SLIP RESISTANCE



American Oak 6500
152 x 914mm




White Oak 6505
152 x 914mm



Blond Country Plank 6501
152 x 914mm



Light Elm 6506
152 x 914mm

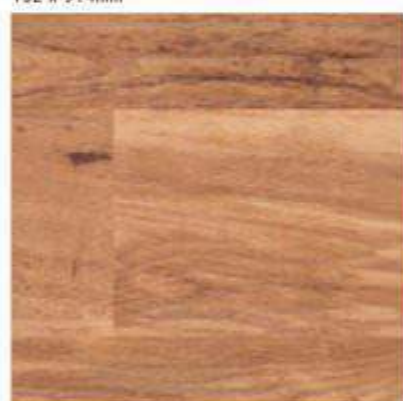

Nut Tree 6502
152 x 914mm



Weathered Country Plank 6504
152 x 914mm



Classic Oak 6503
152 x 914mm



KEY FEATURES

The first EN 13845 sustainable slip resistant LVT in the World.

Featuring a polyurethane reinforcement to assist ongoing maintenance, offering cost saving of up to 60%.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE

40% RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk



Portland Stone 7500
457 x 457mm



Classic Yorkstone 7502
457 x 457mm



Classic Limestone 7501
457 x 457mm



Cambrian Stone 7507
305 x 610mm



Smoked Limestone 7503
457 x 457mm



Warm Grey Concrete 7504
457 x 457mm



Roman Limestone 7506
305 x 610mm

SPECIFICATIONS



GAUGE: 2.5mm, wear layer 0.7mm

AVAILABILITY: Tile & Plank: sizes as shown



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Bevel Line PUR

COLLECTION OF BEVELLED WOOD AND STONE DESIGNS DEVELOPED FOR VERY HEAVY COMMERCIAL PROJECTS

WOOD



Grey Ash 1998
101 x 914mm



Smoked Chestnut 1999
101 x 914mm




Maple 1972
101 x 914mm




Beech 1973
101 x 914mm



American Oak 1974
101 x 914mm

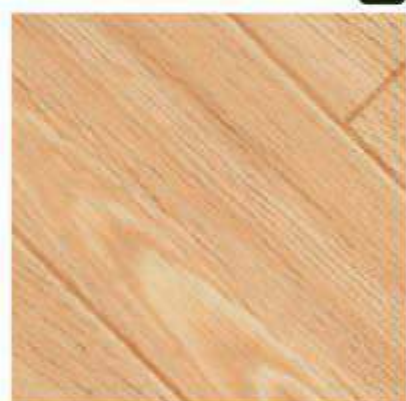


Light Oak 1971
101 x 914mm

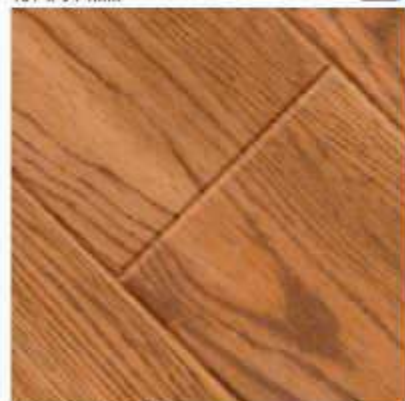

Rich Oak 1975
101 x 914mm



French Nut Tree 1976
101 x 914mm

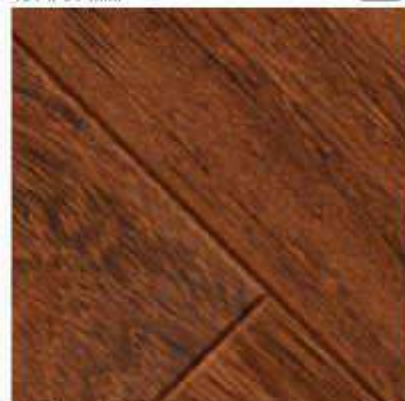

Merbau 1977
101 x 914mm



Mahogany 1978
101 x 914mm



KEY FEATURES

Luxury vinyl tile range featuring authentic and popular wood and stone designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.


Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com

STONE

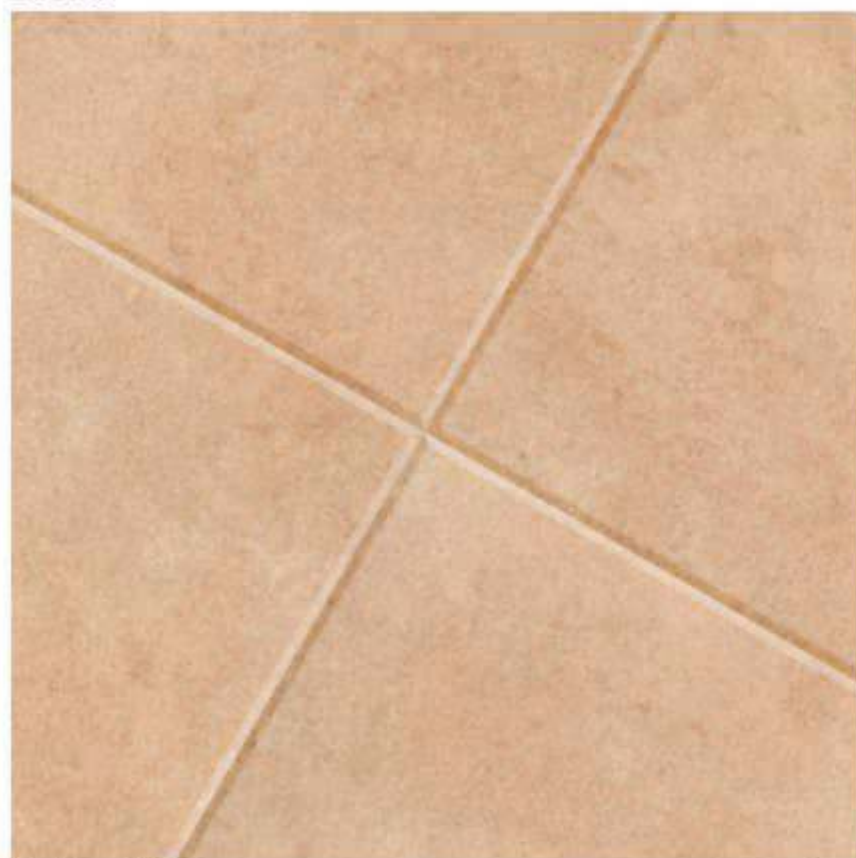

Sandstone 1984
457 x 457mm

R10




Smoked Limestone 1985
457 x 457mm

R10



Ivory Stone 1980
457 x 457mm

R10

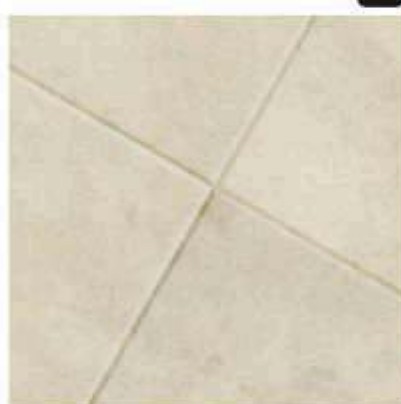


Portland Stone 1981
457 x 457mm

R10




Shellstone 1982
457 x 457mm

R10

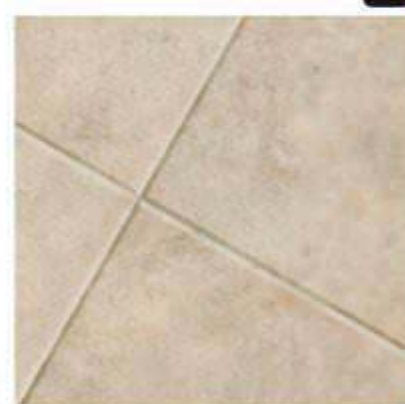


Limestone 1983
457 x 457mm

R10

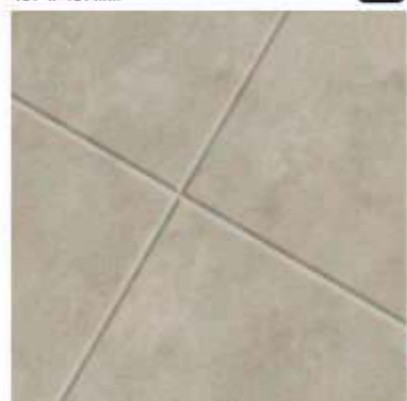


Brushed Concrete 1986
457 x 457mm

R10

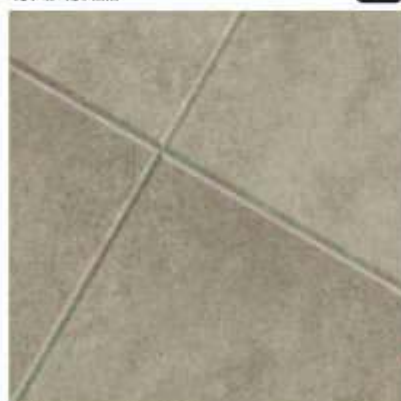


Wet Concrete 1987
457 x 457mm

R10

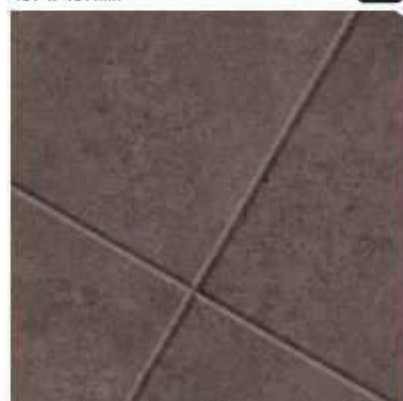

Burnt Sandstone 1988
457 x 457mm

R10

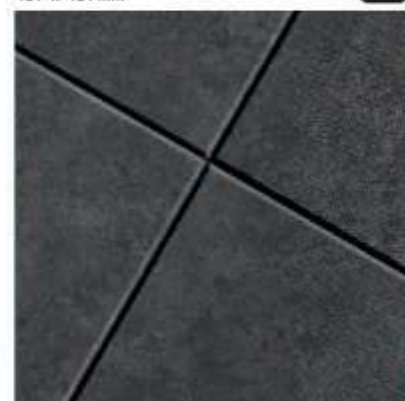

Black Limestone 1989
457 x 457mm

R10

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.7mm

AVAILABILITY: Tile & Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Camaro PUR

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE, SLATE AND MARBLE DESIGN TILES FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS


WOOD



Ambrosia Maple 2231
101 x 914mm



American Oak 2217
101 x 914mm

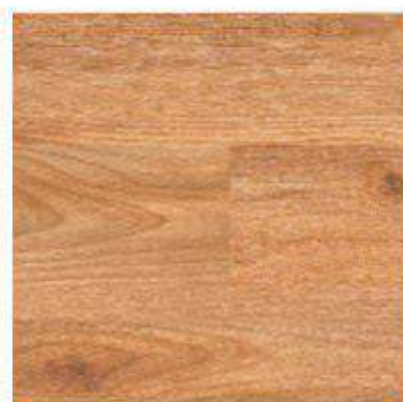


Waxed Pine 2206
101 x 914mm



Nut Tree 2202
101 x 914mm



Natural Oak 2232
152 x 1219mm

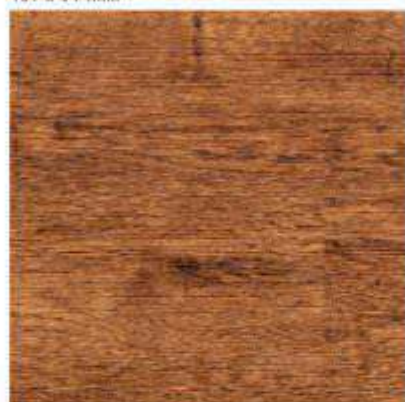

Vintage Timber 2220
152 x 914mm



Classic Oak 2216
101 x 914mm



Warwick Oak 2235
101 x 914mm




White Limed Oak 2229
152 x 914mm



Smoke Brushed Elm 2233
152 x 914mm



Figured Pine 2234
152 x 1219mm

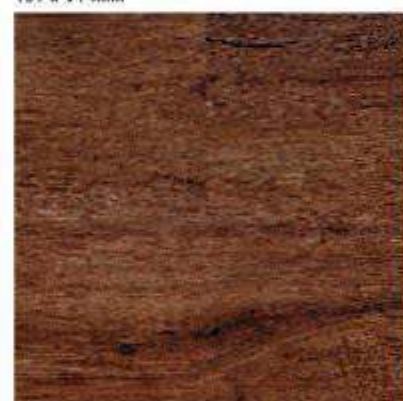


North American Walnut 2236
152 x 914mm



Country Teak 2238
152 x 914mm



Roasted Oak 2237
152 x 1219mm

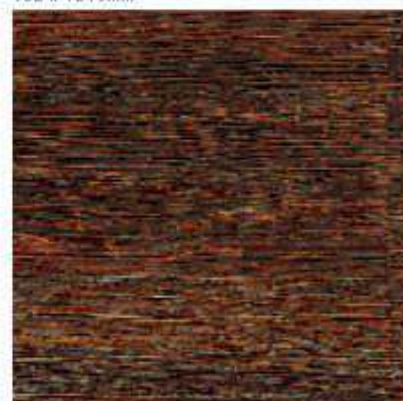

Heritage Oak 2239
203 x 1219mm

KEY FEATURES

Luxury vinyl plank and tile collection featuring creative and authentic wood and stone designs. Accurate timber variation, grain and knots are sympathetically represented. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649/EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com

STONE



White Oilshale 2331
305 x 305mm



White Metalstone 2332
305 x 610mm



Portico Limestone 2334
305 x 610mm



Ivory Stone 2333
457 x 457mm



Classic Limestone 2335
457 x 457mm



Travertine 2304
305 x 610mm



Classic Yorkstone 2336
303 x 305mm



Crema Slate 2318
305 x 610mm



Romano Stone 2301
305 x 305mm



Serpentine 2337
305 x 305mm



Aged Metalstone 2338
305 x 610mm



Ocean Slate 2319
305 x 610mm



Atlantic Slate 2339
305 x 305mm



Black Oilshale 2340
305 x 305mm



Black Marble 2317
305 x 305mm

SPECIFICATIONS

The **R₁₀** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.3mm

AVAILABILITY: Tile & Plank: sizes as shown




This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Colonia PUR

COLLECTION OF AUTHENTIC WOOD AND STONE DESIGNS FOR RESIDENTIAL APPLICATIONS


WOOD

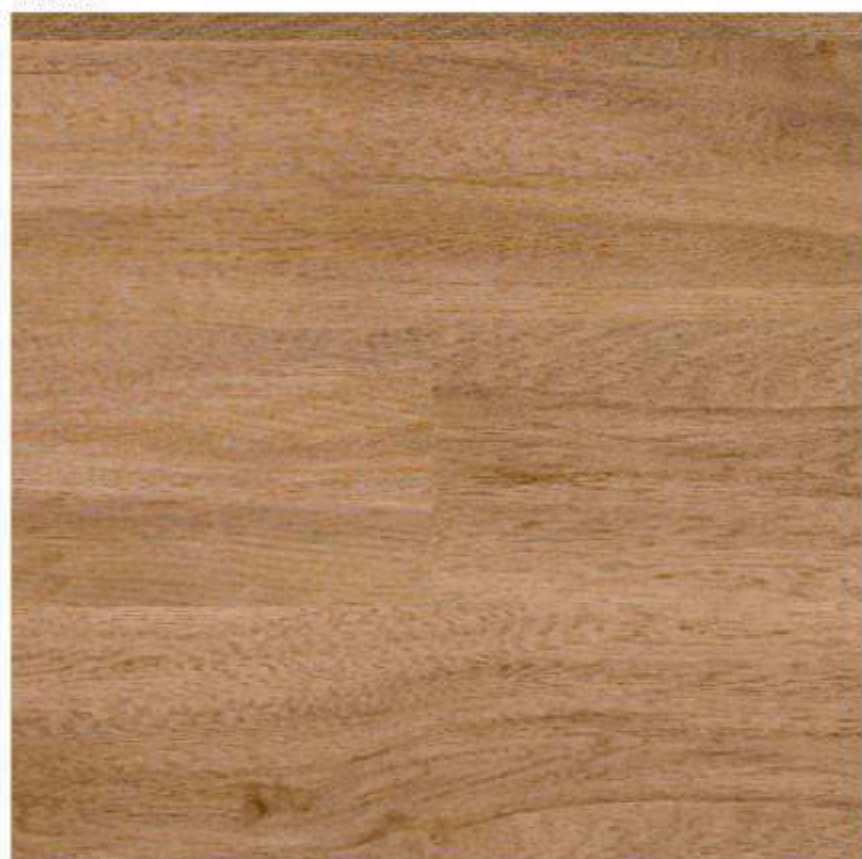

English Oak 4435
152 x 1219mm



Kings Oak 4437
184 x 1219mm

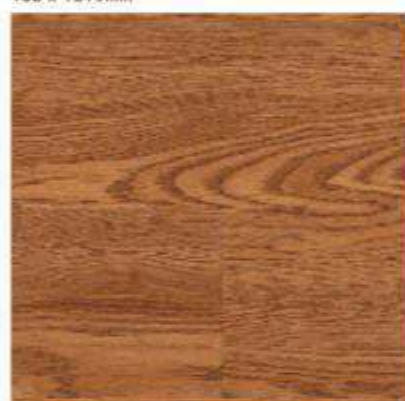

Woodland Oak 4411
101 x 914mm



Schoolhouse Oak 4434
152 x 1219mm




Oxford Maple 4431
152 x 914mm



Virginia Walnut 4432
152 x 914mm




Nordic White Oak 4436
184 x 1219mm

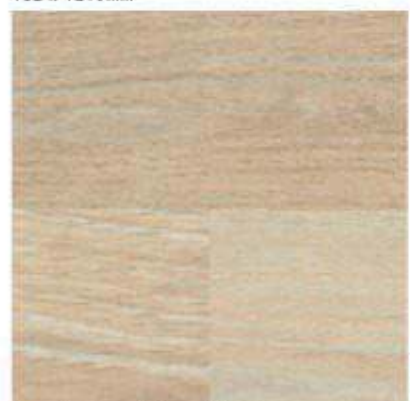

New England Elm 4433
152 x 1219mm



Mountain Alder 4401
101 x 914mm

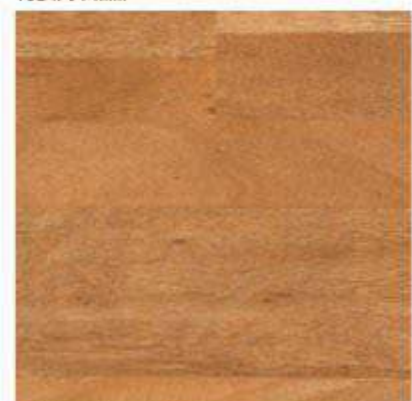

Golden Koa 4403
101 x 914mm

KEY FEATURES

Collection of luxury vinyl tiles inspired by natural wood and stone materials for residential applications.

Shades and textures can be combined to create stunning floor designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product

Conforms to EN 649/EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com

STONE



Welsh Raven Slate 4535
305 x 610mm



Natural Limestone 4536
457 x 457mm



Imperial Black Marble 4515
305 x 305mm



Quarried Millstone 4532
305 x 305mm



Fossil Limestone 4537
457 x 457mm



Cottage Yorkstone 4531
305 x 305mm



Balmoral Grey Slate 4534
305 x 610mm



Glazed Metalstone 4533
305 x 610mm

SPECIFICATIONS

The **R_v values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.2mm

AVAILABILITY: Tile & Plank: sizes as shown



This range includes highly realistic replications of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS

WOOD



Grey Country Oak 2506



Blond Country Oak 2507



American Oak 2503




Natural Oak 2502




Light Cherry 2501



Rich Oak 2500

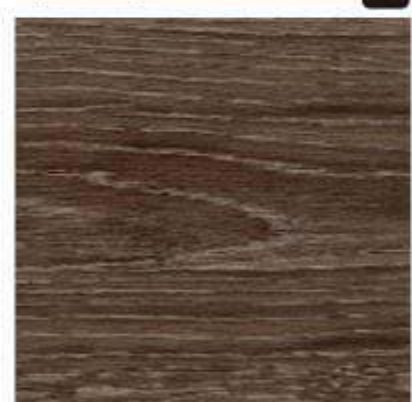

Dark Country Oak 2505

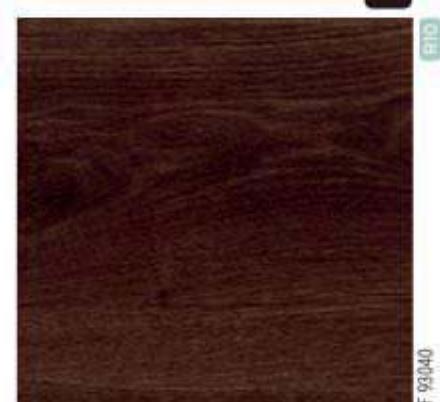

Rich Walnut 2504



KEY FEATURES

A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.

Authentic replications of wood, stone and textile effects.

Polyurethane reinforcement provides an excellent foundation for an on going cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10582.



These items feature a bevelled edge.



100% RECYCLABLE & REUSABLE
20% RECYCLED MATERIAL



STONE & TEXTILE



Lined Concrete 2540



Black Concrete 2541



Champagne Limestone 2542



Jerusalem Limestone 2543



Cathedral Limestone 2544



Ground Limestone 2545



Porcelain Weave 2546



Charcoal Weave 2547

EF = expansion filler

SPECIFICATIONS

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



GAUGE: 5.0mm, wear layer 0.7mm

AVAILABILITY: Wood planks: 177.8 x 1219.2mm
Stone & textile tiles: 457.2 x 457.2mm

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


LVT Design Accessories

INDIVIDUAL FLOOR CONCEPTS DEVELOPED FROM A VARIETY OF DESIGN ACCESSORIES.
THE FOLLOWING INFORMATION PROVIDES DETAILS OF AVAILABLE PRODUCTS.



Expona Design PUR and Expona Commercial PUR

Each of these collections have been compiled so the planks and tiles can be combined within the same installation. Collections can not be mixed. The brochure displays many exciting installation ideas along with a selection of Grouting, Marquetry & Feature Strips, to offer further scope for creativity. Refer to the brochure or log onto www.polyflor.com to view the online version.

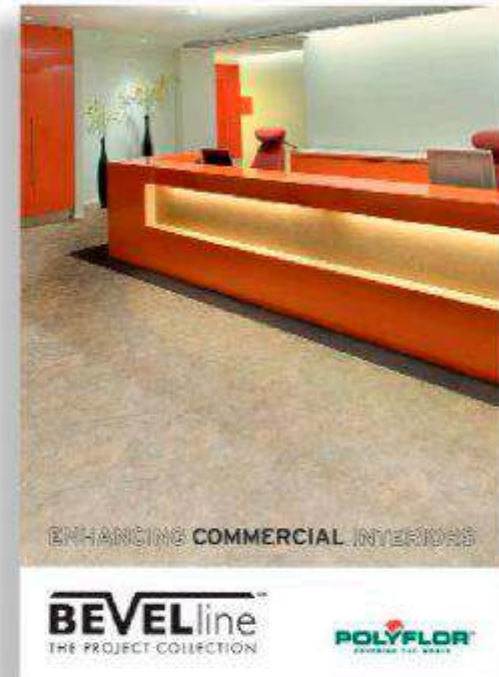

Bevel Line PUR

Standard borders and inlay designs are not offered with the Bevel Line collection as it is recommended to always feature bevelled edges against each other for aesthetic and performance benefits. A selection of Feature Strips, Grouting Strips & Marquetry Strips are readily available for use with tiles and planks to create natural grout and ships decking effects. Refer to the Bevel Line product brochure for further details of colours of strips available or log onto www.polyflor.com to view the online version.




Expona Control PUR

As the tiles and planks in this collection feature an aggregate within the wear layer, it is not recommended to produce bespoke cut floor designs, to ensure the edges remain straight and true. Creative inlay strips are offered to produce more installations options, or products can be inlaid together to create zonal floor areas. Refer to the brochure or log onto www.polyflor.com to view the online version.


Colonia PUR

The Colonia collection of residential luxury vinyl tiles features a wide range of high-design planks and tiles. These are supported by a tailored range of design accessories including Grouting, Marquetry and Feature Strips along with a wide range of design floor ideas. For full details on the collection, refer to the new 124 page product brochure or log onto www.polyflor.com to view the online version.

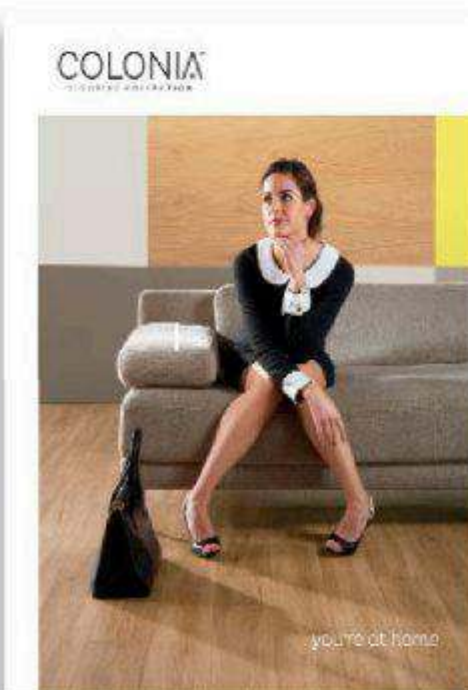

Camaro PUR

The Camaro collection of residential and light commercial luxury vinyl tiles features a wide range of high-design planks and tiles. These are supported by a tailored range of design accessories including Grouting, Marquetry and Feature Strips along with a wide range of design floor ideas. For full details on the collection, refer to the new 104 page product brochure or log onto www.polyflor.com to view the online version.

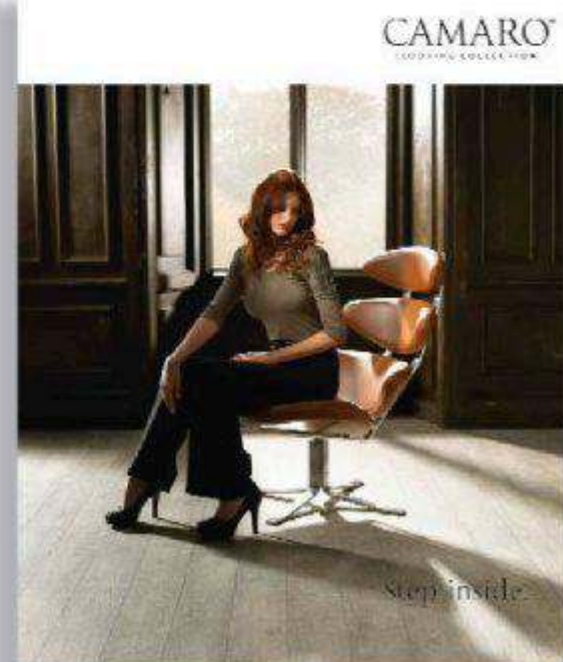

SD Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION



POLYFLOR SD



Ocean Blue 5050



Golden Sand 5070



Flaxen 5060



Teal 5080




Steel Grey 5030




Silver Grey 5110


FINESSE SD

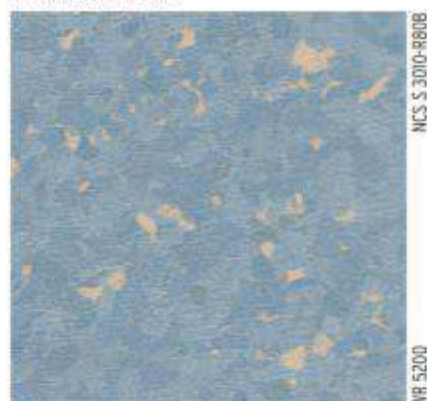

Cascade 5800

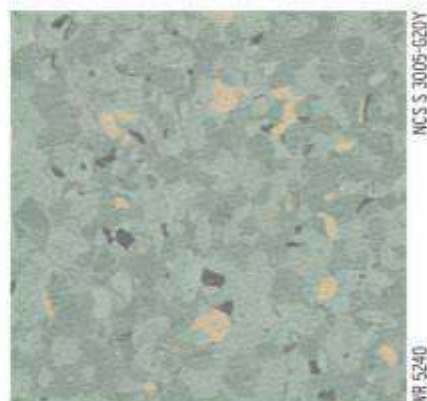

Woodglade 5840

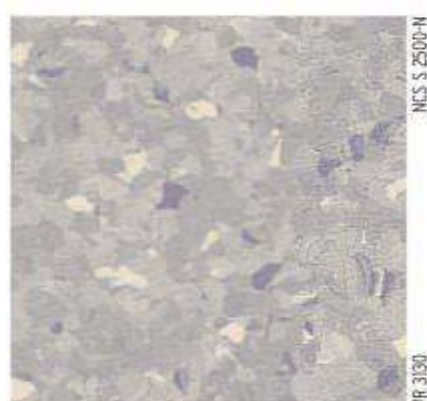

Daybreak 5820



Lodestone 5830



Moonscape 5860



KEY FEATURES

- High-performance, homogeneous floorcoverings with static dissipative properties.
- Choice of marbleised or non-directional decoration.
- Conforms to a broad range of ESD standards.
- Conforms to EN 649 / EN ISO 10581.



100% RECYCLABLE
25% RECYCLED MATERIAL

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet
Tile: 608 x 608 mm

EC Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION



FINESSE EC

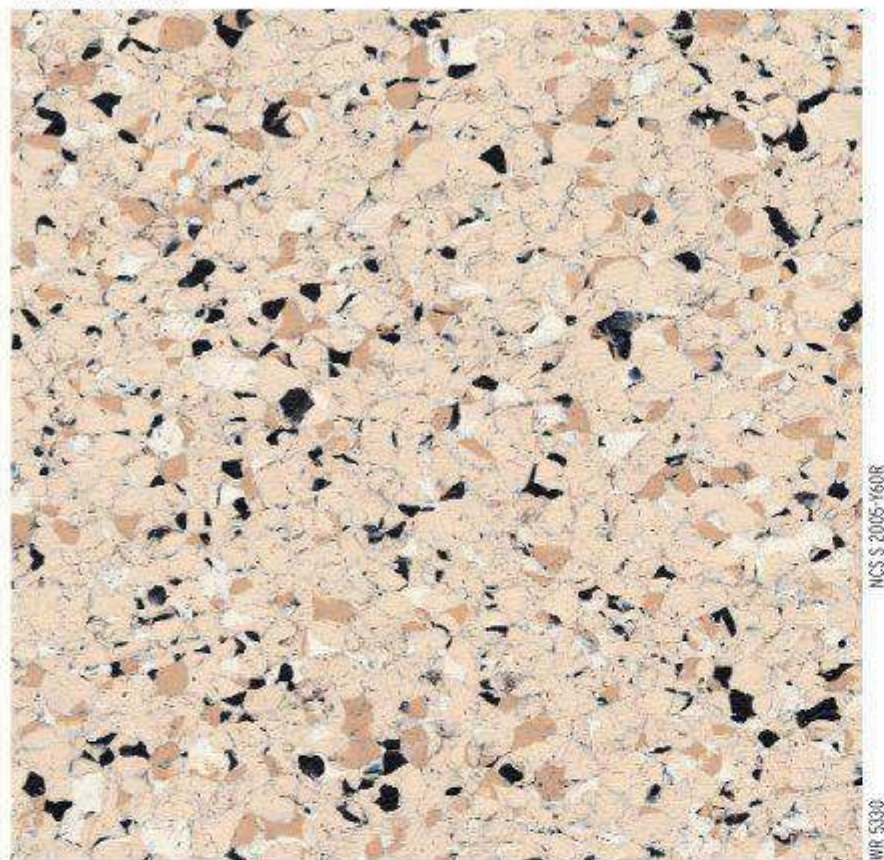

Corn Husk 5330

POLYFLOR EC




Black/Grey 8990

CONDUCTIVE ROF*




Black 5980

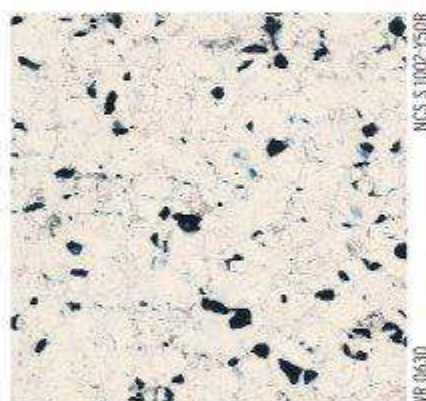


Birchwood 5360



Silver Leaf 5320

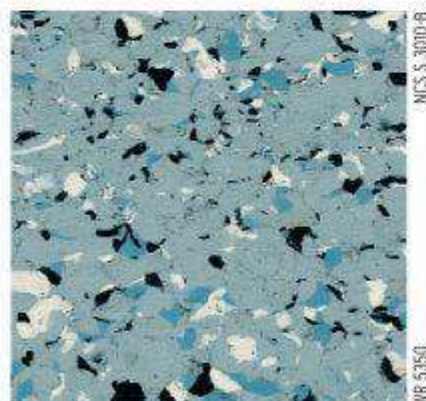

Water Ripple 5350

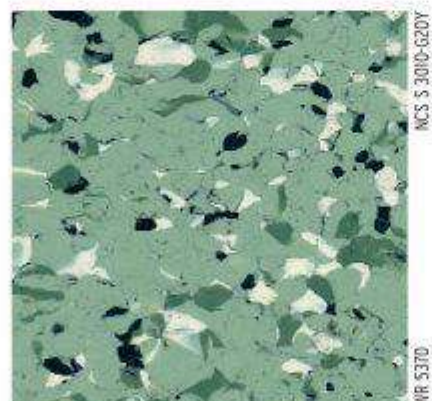

Hedgerow 5370

KEY FEATURES

High-performance, homogeneous floorcoverings with electrostatic conductive properties.

Conforms to a broad range of ESD standards.

Conforms to EN 649 / EN ISO 10581.

*ROF option is intended for explosive handling areas. It does not offer protection from a short circuit on a 240/250 volt mains, so installation and switching in these rooms are critical and must be considered, prior to any handover.



100% RECYCLABLE
25% RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 608 x 608 mm

* ROF - Available in sheet only

Polyclad Pro and Plus PU

TOUGH, DURABLE AND FLEXIBLE VINYL WALL AND CEILING CLADDING FEATURING THE PROTECTION OF A POLYURETHANE SURFACE TREATMENT



POLYCLAD PRO PU



White Chalk 4093



Frosted Grey 4094



Biscuit Beige 4092



Blue Shingle 4097



Grey Steel 4095




Dusted Blue 4096

POLYCLAD PLUS PU



Summer Sky 2830

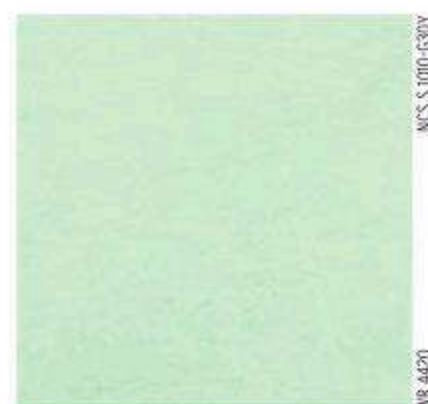


Spring Fern 2810



Frosted Cream 2800



Nimbus Grey 2710

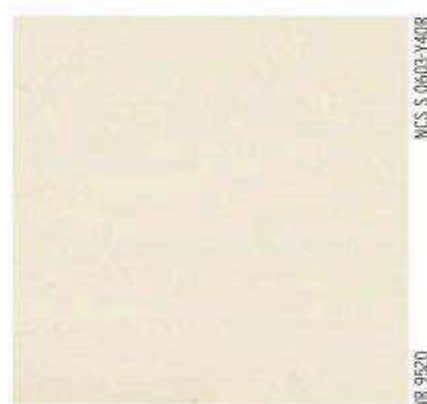

Polar Ice 2840



Dove White 2700

KEY FEATURES

Wall and ceiling cladding sheet featuring a subtle marbled decoration.

Polyurethane surface treatment provides benefits in terms of hygiene and ease of maintenance.

Designed to be welded to Polyflor floorcoverings, to provide a floor-to-wall surface that provides an excellent barrier to dirt and infection.

Ideal for wet and hygiene-critical areas.



100% RECYCLABLE
25% RECYCLED MATERIAL

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




SPECIFICATIONS

GAUGE: Polyclad Pro PU 1.25mm
Polyclad Plus PU 2.0mm

AVAILABILITY: Sheet

Polyflor Sport

HARDWEARING VINYL SPORTSFLOOR DESIGNED FOR USE IN 'MULTI-PURPOSE' INDOOR SPORTS ARENAS

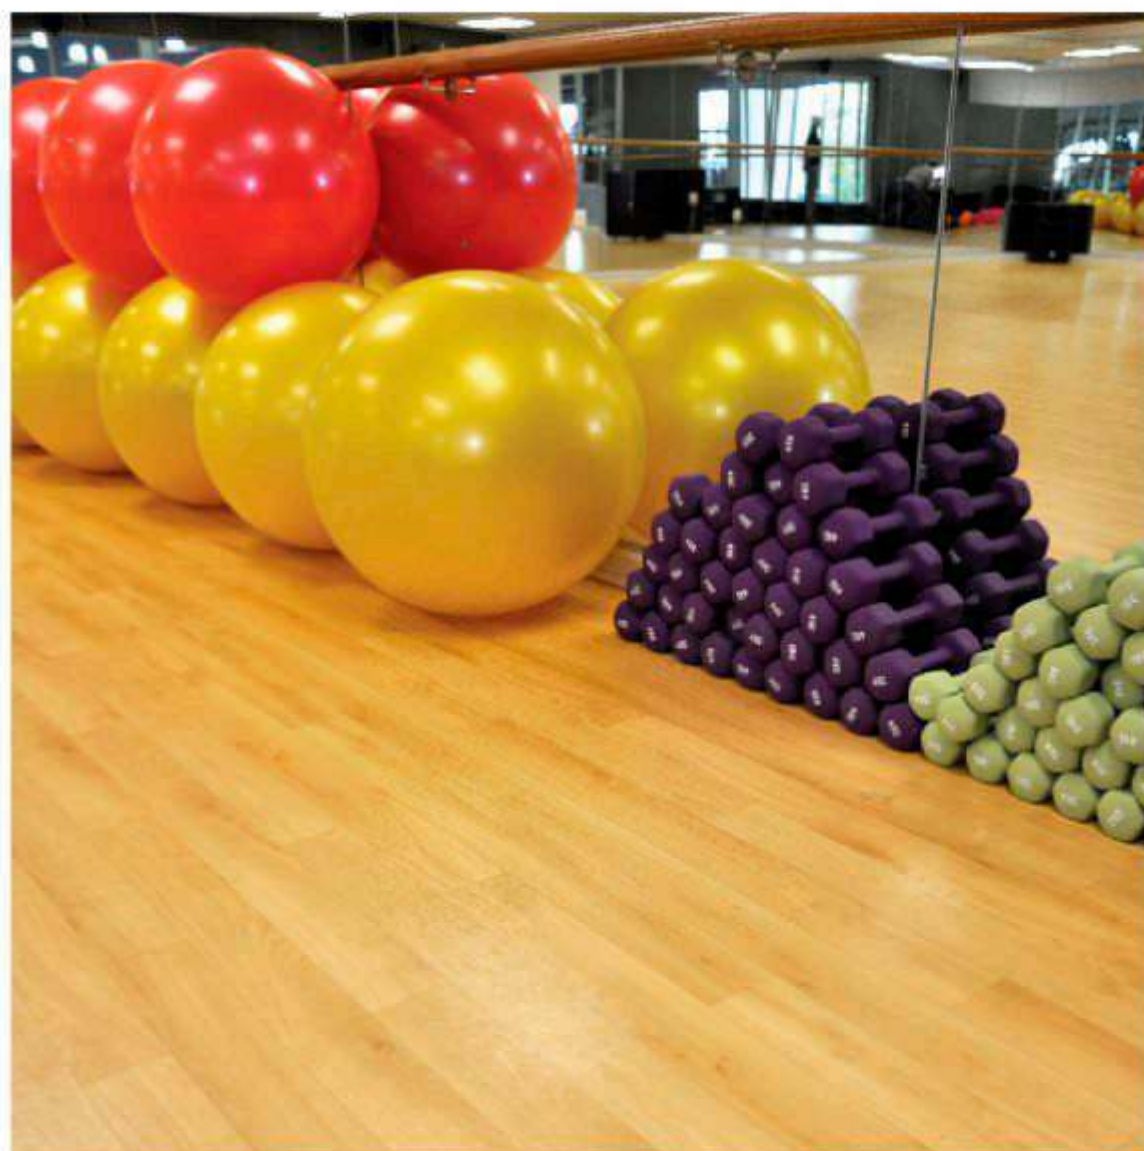


Maple 7516



Green 7515



Blue 7512

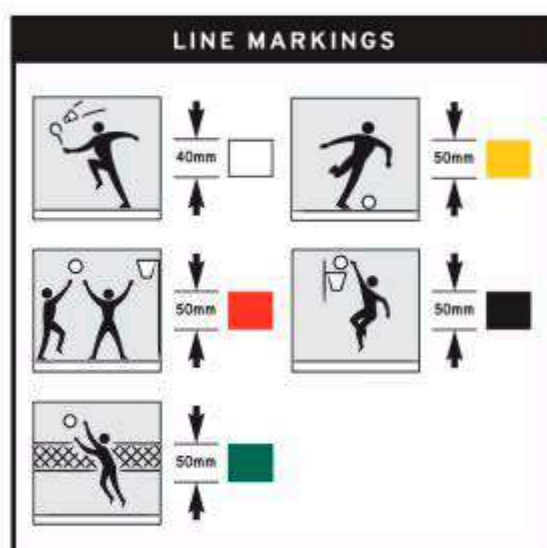

KEY FEATURES

High performance vinyl sheet sports flooring conforming to EN 14904.

Designed to perform safely and effectively in 'multi-purpose' indoor sports venues.

Suitable for basketball, netball, volleyball, gymnastics, badminton, handball, indoor football, martial arts and others.

SPECIFICATIONS

GAUGE: 6.7mm


AVAILABILITY: Sheet 2m x 18.5m

Note, standard sheet length is now 18.5m.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




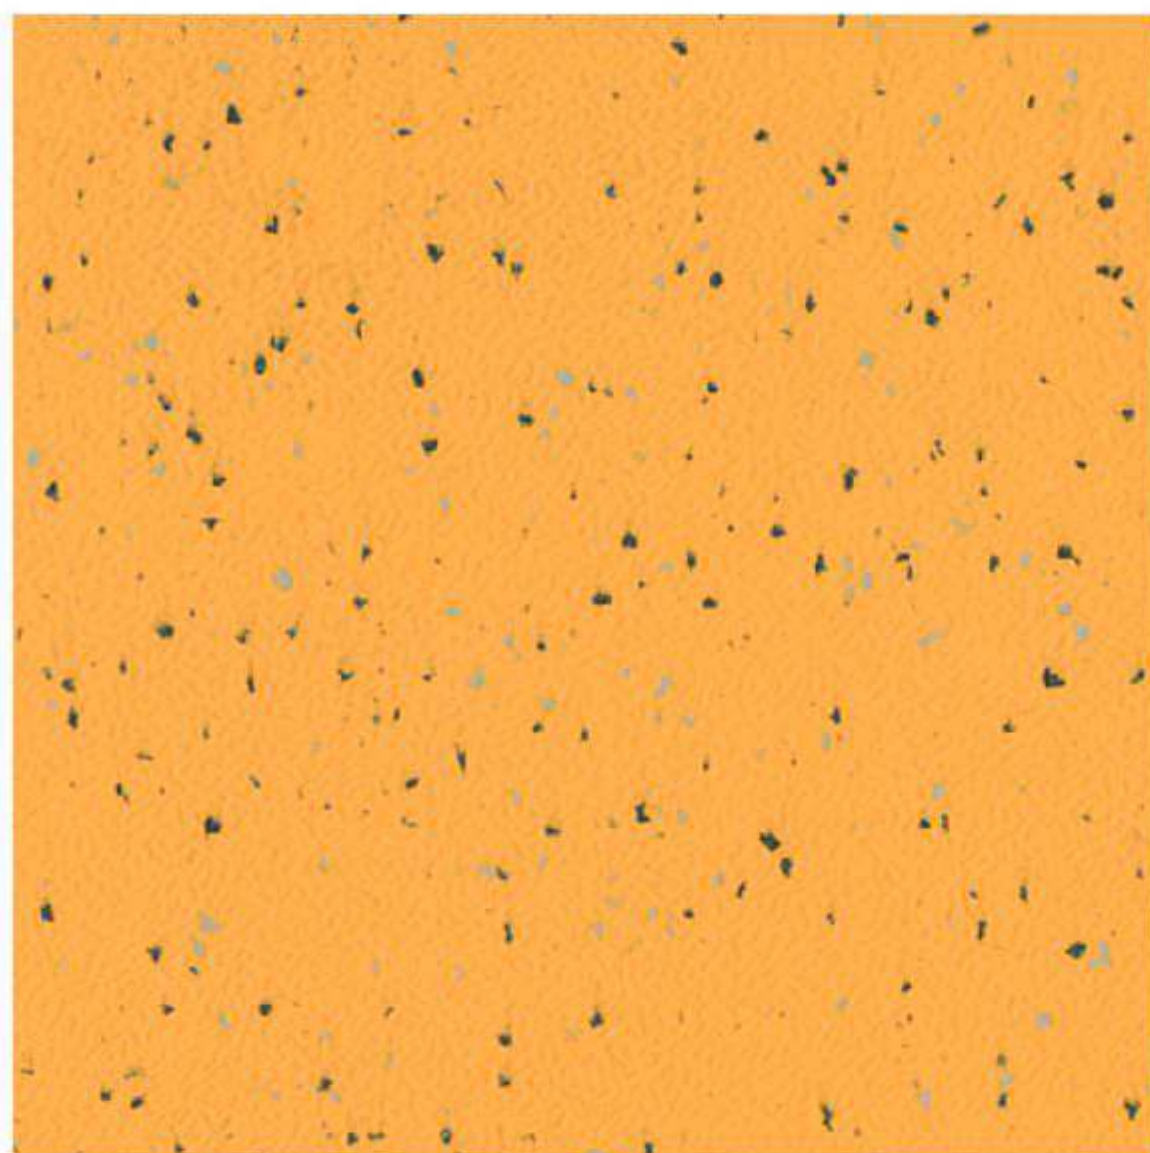

Mustard 503




Almond 206



Cotton 313




Rice 203



Pepper 306




Mocha 205



Raisin 307




Molasses 210




Apricot 607



Lentil 408




Sea Salt 213




Blue Poppy 702




Water Lily 707



Blue Vervain 713



Tomato 611



Water Melon 413

KEY FEATURES

Hardwearing rubber sheet floorcovering designed for heavy traffic commercial areas.

Multi-coloured chip decoration with embossed surface finish.

Inherent sound deadening properties and cigarette burn resistance.

Conforms to EN 1817: 1998.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Noppe Stud Tile

COMMERCIAL RUBBER STUD TILE



Group 1



Steel 014*



Limestone Green 013*



Green Baize 015



Deep Blue 191*



Anthracite 102*



Black Coal 101*

Group 2



Sandstone 140



Orange 010



Warm Red 012



Mercury 129



Cool Blue 707*



Cobalt 019

KEY FEATURES


- Hardwearing commercial rubber floor tile.
- Low-profile studded surface.
- Conforms to EN 12199: 1998.
- Resistant to cigarette burns.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS

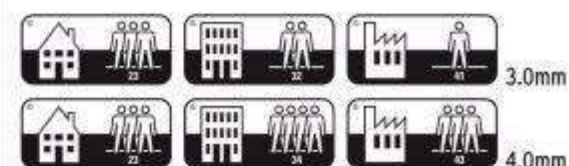

GAUGE: 3.0mm, 4.0mm

AVAILABILITY: Tile: 500 x 500mm

All shades are available in 3.0mm. *Also available in 4.0mm



Blue 9650



Light Fawn 9590



White 9520




Light Beige 9610



Fawn 9580



Beige 9600



Brown 9560



Russet 9620




Dark Brown 9570




Green 9640



Cream 9630



Light Grey 9550



Grey 9540




Dark Grey 9530



Black 9510

PRODUCT	CODE	GAUGE/SIZE	UNIT LENGTH	STANDARD PACK	EX-STOCK COLOURS
SIT-ON COVING	MC8	20 x 100 mm	2 metres	20 x 2 metres	15 colours
	MC14	20 x 75 mm	2 metres	20 x 2 metres	15 colours
SET-IN COVING	MC18	50 x 100 mm	2 metres	20 x 2 metres	15 colours
COILED SKIRTING	MC8c SIT-ON	20 x 100 mm	20 metres	2 x 20 metres coil*	15 colours
	MC18c SET-IN	50 x 100 mm	20 metres	2 x 20 metres coil*	15 colours
COVE FORMER	CF 20mm	20 x 20 mm	2 metres	30 x 2 metres	Black only
	CF 38mm	38 x 38 mm	2 metres	15 x 2 metres	Black only
CAPPING STRIP	CS-N	40 mm	2 metres	40 x 2 metres	15 colours
	CS-NC	40 mm	20 metres coil	20 metres coil*	15 colours
	CS	20 mm	20 metres coil	20 metres coil*	Black only
	CT	41 mm	2 metres	50 x 2 metres	White only
CORNER CAP	EFA 75	75 x 75 mm	2 metres	10 x 2 metres	Black only
WELDING ROD			100 metres coil	100 metres coil*	Colours to match vinyl sheet flooring

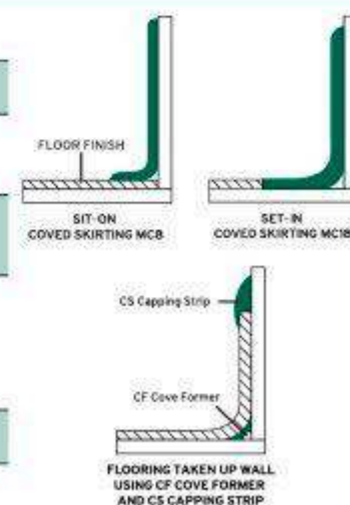


Special colours subject to a minimum order of 500 linear metres (excludes CS, CT, EFA 75, CF) *Supplied in standard packs only.


Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Hydro


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

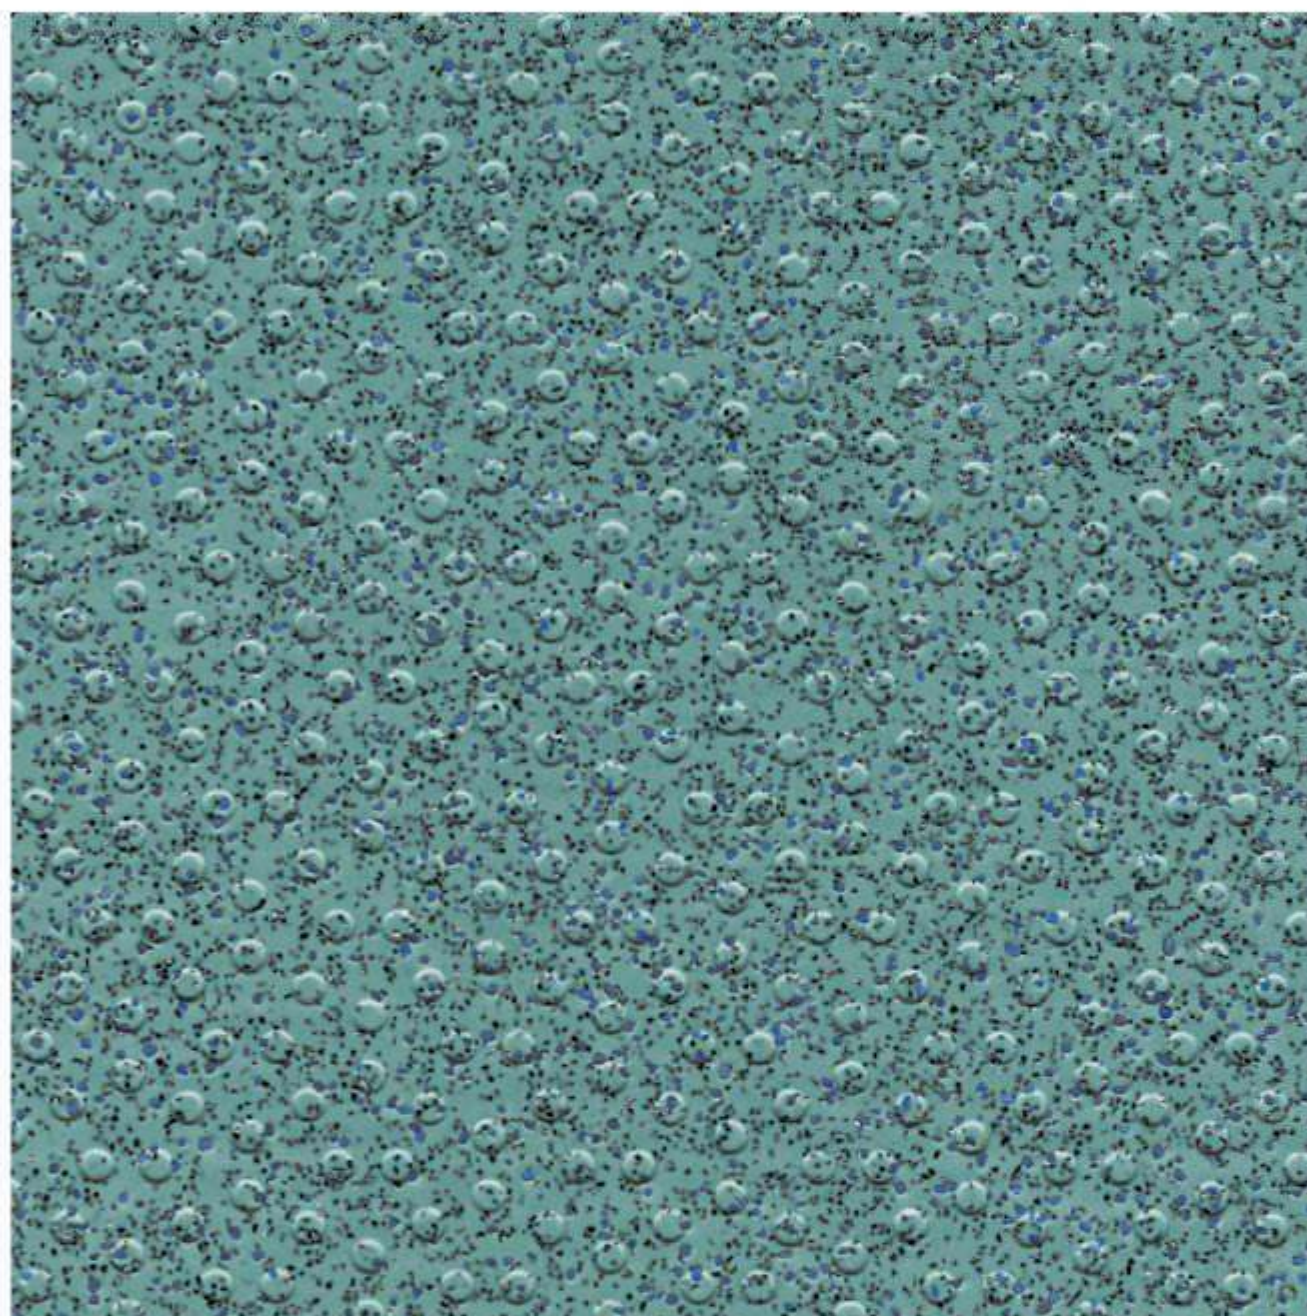


Sheared Slate H4960

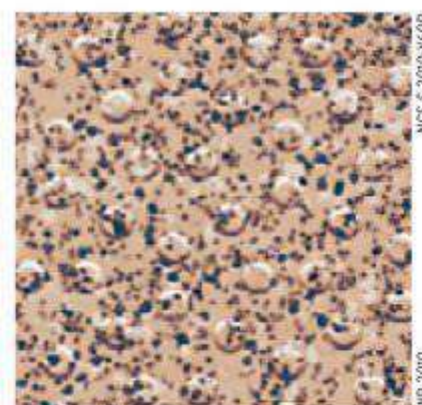


Oystershell H4800

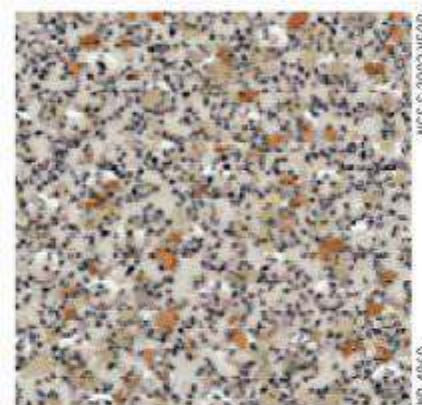


Bisque H4860

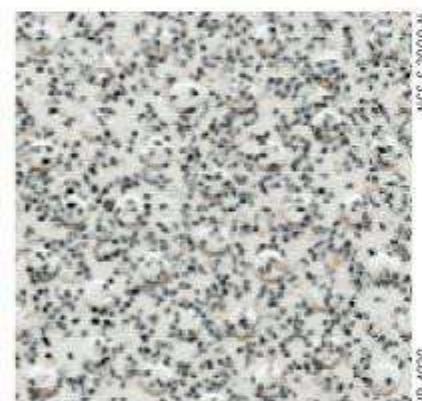


White Stone H4930

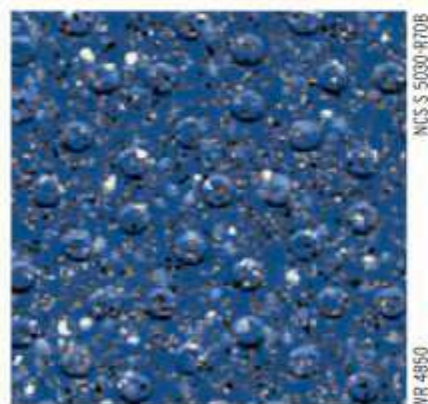


Blue Forge H4850

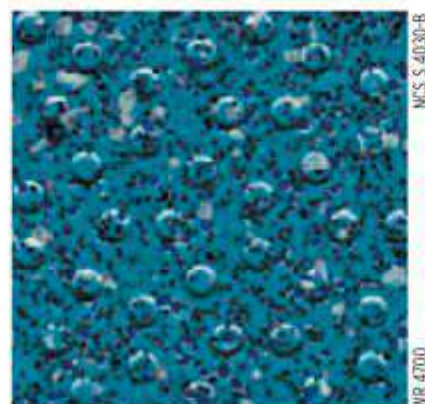

Marine H4870

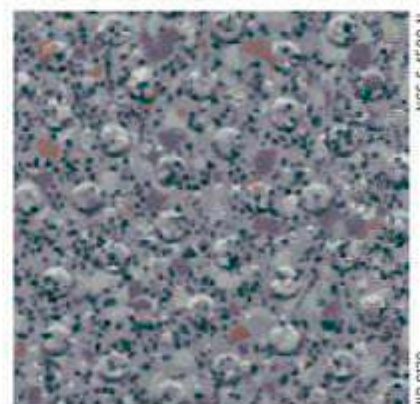

Woodland Grey H4770

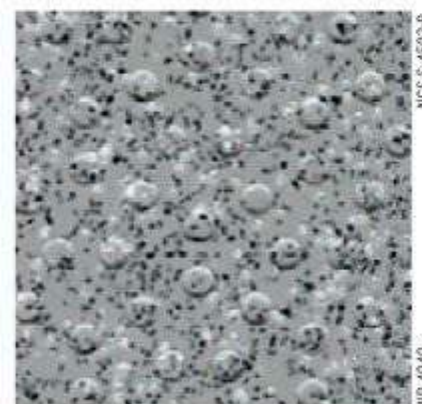

Tempered Steel H4940

KEY FEATURES

Designed for barefoot and continually wet areas.

Features raised pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.
 ≥ 36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm


AVAILABILITY: Sheet

Polysafe Hydro Evolve


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

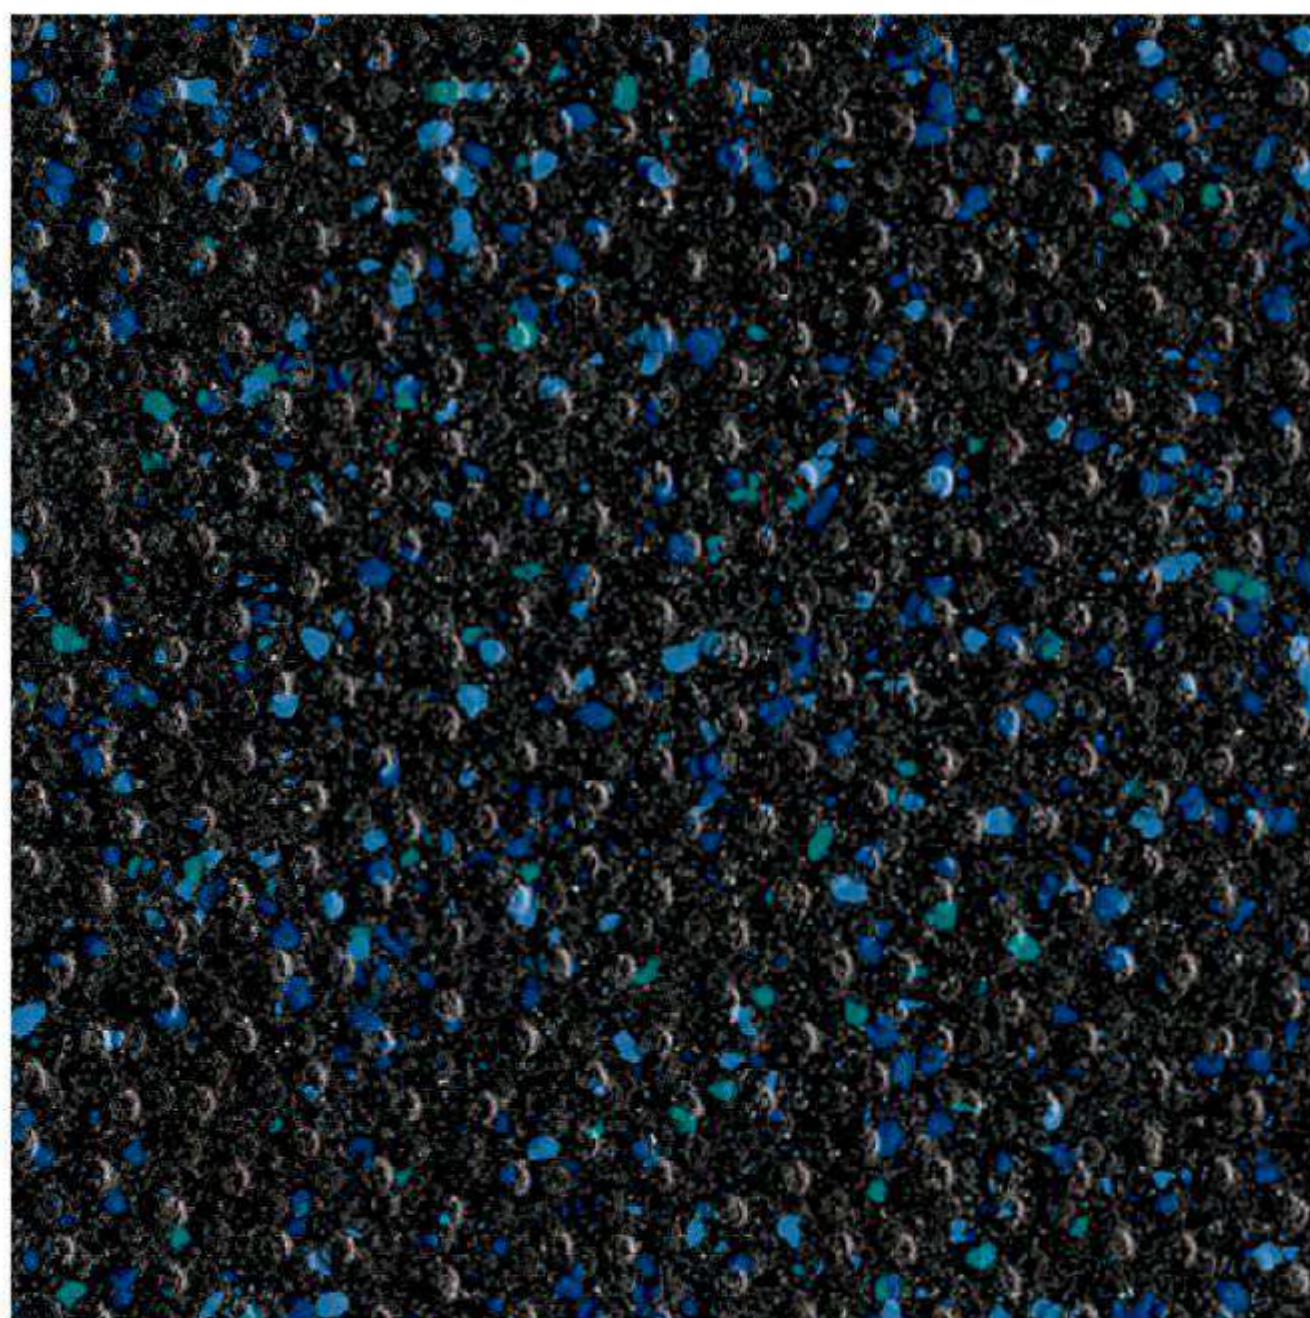


Black Volta 4255

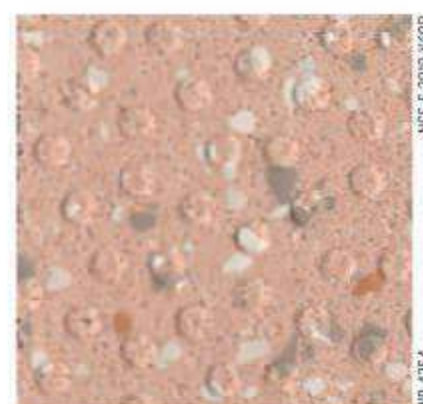


Danube 4254

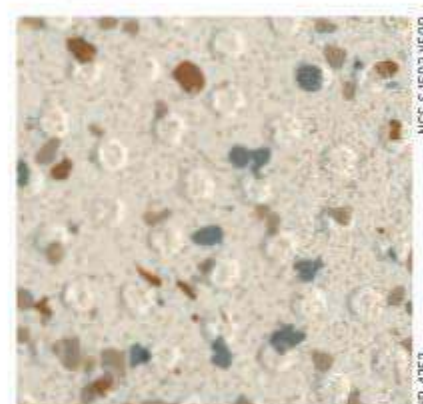


Amazon 4252

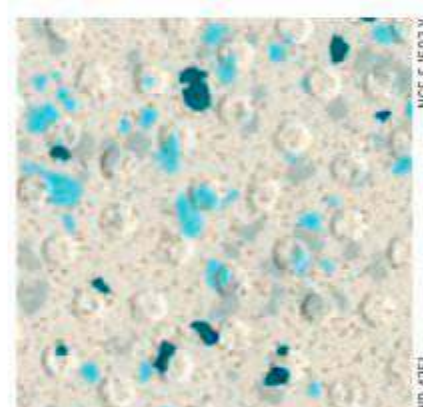


Indus 4251

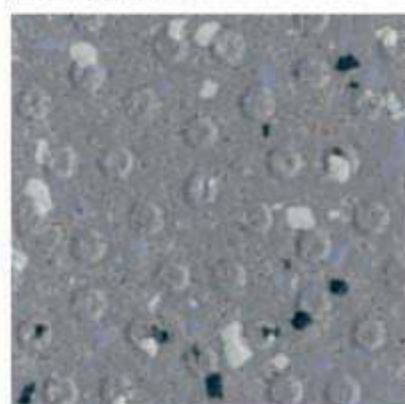


Tigris 4257

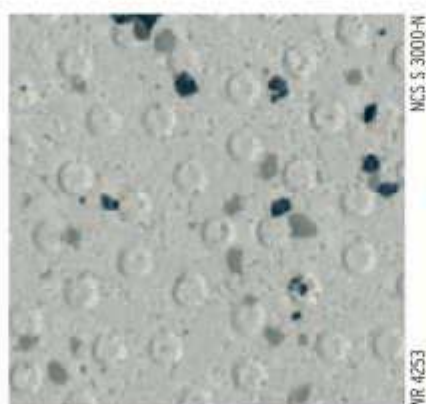

Colorado 4253

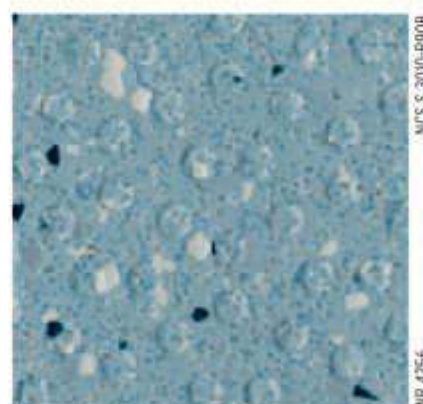

Blue Nile 4256

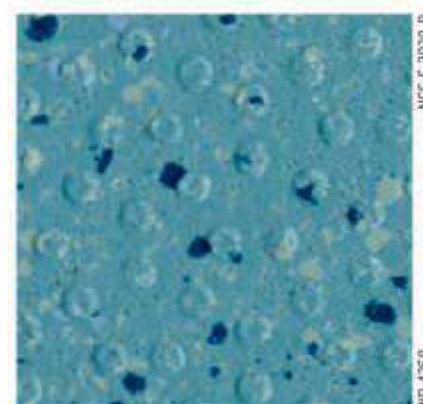

Adriatic 4258

KEY FEATURES

Designed for barefoot and continually wet areas.

Features raised pimple emboss and carborundum-free safety aggregates.

Slip resistance is assured for the guaranteed life of the product.
≥36 (Pendulum wet test).

Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE
CONTAINS RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet


Product Specification

	PEARLAZZO PUR	PRESTIGE PUR	MYSTIQUE PUR	CLASSIC MYSTIQUE PUR	2000 PUR
Gauge	2mm	2mm	2mm	2mm	2mm, 2.5mm
Wear Layer	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ² 2m x 15m = 30m ²
Tile Size	–	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm*
Weight	2950g/m ²	3030g/m ²	3250g/m ²	3250g/m ²	2mm: 3550g/m ² 2.5mm: 4552g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	–	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	<450	<450	<450
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1*
EN 660-2 Abrasion Group EN ISO 10581	Group T Type I	Group P Type I	Group P Type I	Group P Type I	Group M Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+ rating	A+ rating	A+ rating	A+ rating	A+ rating
Hygiene	+	+	+	+	+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

* Tile size available in selected gauges – see tile availability table for more details.

* Certification available for 2mm only.

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



EN ISO 10581

TILE AVAILABILITY AND COVERAGE	TILE SIZE	COVERAGE	TILES PER BOX
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflor SD, Finesse SD, Polyflor EC, Finesse EC	608 x 608mm	5.17m ²	14
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflex Plus PU 1.5/2.0mm	300 x 300mm	4.5m ²	50
2000 PUR 2.5mm, Polyflex Plus PU 2.5mm	300 x 300mm	3.6m ²	40
Noppe Stud Tile 3mm	500 x 500mm	5m ²	20
Noppe Stud Tile 4mm	500 x 500mm	4m ²	16

Product Specification

	XL PU	STANDARD XL	POLYFLEX PLUS PU
Gauge	1.5mm, 2mm	1.5mm, 2mm 2.5mm, 3mm	1.5mm, 2mm, 2.5mm
Roll Size	2m x 27.5m = 55m ² 2m x 20m = 40m ²	2m x 27.5m = 55m ² 2m x 20m = 40m ² 2m x 15m = 30m ² 2m x 13m = 26m ²	–
Tile Size	300 x 300mm* 608 x 608mm*	300 x 300mm* 608 x 608mm*	300 x 300mm
Weight	1.5mm: 2360g/m ² 2mm: 3200g/m ²	1.5mm: 2360g/m ² 2mm: 3200g/m ² 2.5mm: 4200g/m ² 3mm: 5010g/m ²	1.5mm: 2800g/m ² 2mm: 3800g/m ² 2.5mm: 4860g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms*
Use Area Classification	1.5mm: 23, 32, 41 2mm: 23, 34, 43	1.5mm: 23, 32, 41 2mm: 23, 34, 43 2.5mm: 23, 34, 43 3mm: 23, 34, 43	1.5mm: 23, 31 2mm: 23, 33, 42 2.5mm: 23, 34, 43
Agrément	1.5mm: ✓ 2mm: ✓	1.5mm: ✓ 2mm: ✓ 2.5mm: ✓ 3mm: ✓	–
ASTM F1913	Conforms	Conforms	–
ASTM F1700	Conforms	Conforms	–
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	<450	<450†	–
ASTM E648	Class 1	Class 1†	Class 1
EN 660-2 Abrasion Group	Group M	Group M	Group F
EN ISO 10581	Type II	Type II	Type III
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	–
FloorScore	Certified product	Certified product	–
AqBB	Pass	Pass	–
BRE Green Guide	A+ rating	A+ rating	A+ Generic
Hygiene	+	+	–
Maintenance Enhancement	Polyurethane surface treatment	–	Polyurethane surface treatment

† Certification available for 1.5mm and 2mm only.

• Tile size available in selected gauges – see tile availability table for more details.

• 40mm mandrel.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	CORONA PUR	ASTRAL PUR	MOSAIC PUR	MODENA PUR	ARENA PUR	WOOD FX PUR	VOGUE ULTRA PUR
Gauge	2mm	2mm	2mm	2mm	2mm	2mm	2mm
Wear Layer	–	–	0.7mm	0.7mm	0.7mm	0.7mm	–
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2400g/m ²	2450g/m ²	2400g/m ²	2780g/m ²	2780g/m ²	2780g/m ²	2400g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
CE Marking	DA0010	DA0009	DA0035	DA0053	DA0053	DA0053	DA0005
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
EN13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
RRL Pendulum Test	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	R10	R10	R10	R10	R10
Indoor Air Comfort Gold	–	–	–	Approved	Approved	Approved	–
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+ Generic	A+ Generic	A+	A+
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR

* 4S Rubber/Slider 96. ▲ TRL/Slider 55.

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	STANDARD PUR	STRATA	HYDRO	HYDRO EVOLVE	ULTIMA	WOOD FX ACOUSTIX PUR	ECOMAX
Gauge	2mm, 2.5mm, 3.5mm	2mm	2mm	2mm	2.5mm	3.7mm	2mm
Wear Layer	—	—	—	—	—	0.65mm	—
Roll Size	2m x 20m = 40m ² 2m x 15m = 30m ² +	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2mm: 2430g/m ² 2.5mm: 3100g/m ² 3.5mm: 4400g/m ²	2430g/m ²	2700g/m ²	2650g/m ²	3000g/m ²	3000g/m ²	3350g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	—	Conforms
EN 651 / EN ISO 11368	—	—	—	—	—	Conforms	—
CE Marking	DA0003	DA0004	DA0006	DA0052	DA0007	DA0054	—
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 42	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	—	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	—	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
EN ISO 10140-3 / EN ISO 140-8	—	—	—	—	—	≥19dB	—
RRL Pendulum Test	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)▲*	≥36 (wet test)	≥40 (wet test)* ≥36 (wet test)▲	≥36 (wet test)*	≥36 (wet test)*
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥70µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	Class B	Class B	R11	R10	R10
Indoor Air Comfort Gold	—	—	—	—	—	Approved	—
FloorScore	Certified product	—	Certified product	Certified product	Certified product	Certified product	Certified product
AqBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+ Generic	A+	A+	A+ Generic
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	—	—	—	—	Polysafe™ PUR	—

* 3.5mm gauge.

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection



Product Specification

	FOREST FX PUR	ACOUSTIX FOREST FX PUR	ACOUSTIX GALLERY FX PUR	SECURA PUR
Gauge	2mm	3.7mm	3.7mm	3.0mm
Wear Layer	0.7mm	0.65mm	0.6mm	0.35mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 25m = 50m ² 3m x 25m = 75m ² 4m x 25m = 100m ²
Weight	2700g/m ²	2800g/m ²	2800g/m ²	1780g/m ²
EN 649 / EN ISO 10582	Conforms	—	—	—
EN 651	—	Conforms	Conforms	—
EN 653 / EN ISO 26986	—	—	—	Conforms
Use Area Classification	23, 34, 43	23, 34, 42	23, 33, 42	23, 32, 41
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN ISO 10140-3 (EN ISO 140-8)	—	≥19dB	≥19dB	≥19dB
EN 433 Residual Indentation	<0.10mm	<0.2mm	<0.2mm	<0.2mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10
AS/NZS 4586	R10	—	—	R10
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product
AgBB	Very low emissions	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+	+
BRE Green Guide	A+	A+	A+	A Generic
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



EN ISO 10582



EN 651



EN ISO 26986

Product Specification

	EXPONA DESIGN PUR	EXPONA COMMERCIAL PUR	EXPONA CONTROL PUR
Gauge	3mm	2.5mm	2.5mm
Wear Layer	0.7mm	0.55mm	0.7mm
Plank Size: Wood (planks per box)	152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15) 203 x 1219mm (14)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15) 203 x 1219mm (14)	152 x 914mm (24)
Tile Size: Stone/Design (tiles per box)	305 x 610mm (18) 457 x 457mm (16) 305 x 914mm (12) 610 x 610mm (9)	305 x 610mm (18) 457 x 457mm (16) 305 x 914mm (12) 610 x 610mm (9)	305 x 610mm (18) 457 x 457mm (16)
Weight	5100g/m ²	4290g/m ²	4290g/m ²
EN 649/EN ISO 10582	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 33, 42	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	—	—	<450
ASTM E648	Class 1	Class 1	Class 1
EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class ES (wet)
RRL Pendulum Test	—	—	≥36 (wet test)
Surface Roughness Rz	—	—	≥20µm
DIN 51130	R10	R10	—
Responsible Sourcing BES 6001 SA 8000	Very Good Approved Factory	Very Good Approved Factory	Very Good Approved Factory
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	BEVEL LINE PUR	CAMARO PUR	COLONIA PUR	SIMPLAY PUR
Gauge	2.5mm	2mm	2mm	5mm
Wear Layer	0.7mm	0.3mm	0.2mm	0.7mm
Plank Size: Wood (planks per box)	101 x 914mm (36)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 203 x 1219mm (14)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15)	178 x 1219mm (10)
Tile Size: Stone/Design (tiles per box)	457 x 457mm (16)	305 x 305mm (36) 305 x 610mm (18) 457 x 457mm (16)	305 x 305mm (36) 305 x 610mm (18) 457 x 457mm (16)	457 x 457mm (12)
Weight	4200g/m ²	3600g/m ²	3680g/m ²	8000g/m ²
EN 649/EN ISO 10582	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 31	22	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
ASTM E648	Class 1	—	—	Class 1
EN 649/EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10
Responsible Sourcing BES 6001 SA 8000	Very Good Approved Factory	Very Good Approved Factory	Very Good Approved Factory	— —
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement



Product Specification

POLYFLOR SPORT	
Gauge	6.7mm
Roll Size	2m x 18.5m = 37m ²
Weight	Plain 4260g/m ² Maple 4510g/m ²
EN 14904	Conforms
EN 13501-1	Class Cfl-S1
EN ISO 9239-1	≥4.5kw/m ²
EN ISO 11925-2	Pass
EN 649 Abrasion Group	Group T
EN 13893	Class DS (dry)
Maintenance Enhancement	Polymer surface treatment

DIAMANT		NOPPE STUD TILE
Gauge	2mm	3mm, 4mm
Tile Size	—	500 x 500mm
Roll Size	1.90m x 15m = 28.5m ²	—
Weight	3200g/m ²	3mm: 4200g/m ² 4mm: 5600g/m ²
EN 1817	Conforms	—
EN 12199	—	Conforms
Use Area Classification	23, 34, 42	3mm: 23, 32, 41 4mm: 23, 34, 43
EN 13501-1	Class Bfl-S1	Class Cfl-S1
EN ISO 9239-1	≥8kw/m ²	≥4.5kw/m ²
EN ISO 11925-2	Pass	Pass
EN 13893	Class DS (dry)	Class DS (dry)



	SD	FINESSE SD	POLYFLOR EC	FINESSE EC	CONDUCTIVE ROF†
Gauge	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Tile Size	608 x 608mm	608 x 608mm	608 x 608mm	608 x 608mm	—
Weight	3400g/m ²	3030g/m ²	3500g/m ²	2900g/m ²	3300g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	34, 43	34, 43	34, 43	34, 43	34, 43
Agrément	✓	✓	—	—	—
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	—	<450	—
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
EN 649 Abrasion Group	Group M	Group P	Group M	Group P	Group M
EN ISO 10581	Type II	Type I	Type II	Type I	Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
IEC 61340-4-1 2003 R ₆	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	—
EN 1081 R ₁ /R ₂	<10 ⁹ ohms	<10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	<5 x 10 ⁴ ohms
ESD S 7.1	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	—
BRE Green Guide	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)
Hygiene	+	+	—	+	—

† Polyflor ROF flooring for explosive handling areas, no protection from short circuit on a 240/250 volt mains.
All SD results require minimum 40% R.H.

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	POLYCLAD PRO PU	POLYCLAD PLUS PU
Gauge	1.25mm	2mm
Roll Size	1.83m x 30m = 54.9m ²	2m x 20m = 40m ²
Weight	1900g/m ²	3530g/m ²
BS 476: Part 6	—	(I)<12 (II)<6*
BS 476: Part 7	—	Class 1*
EN 13501-1	B-s2-d0	B-s3-d0
Hygiene	+	+
Maintenance Enhancement	Polyurethane surface treatment	Polyurethane surface treatment

* For details of how this result was achieved (eg. adhesive, plasterboard), contact Polyflor.

 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KAQ058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s2-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KAQ058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s3-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD



ENVIRONMENTALLY PREFERABLE FLOORING

At Polyflor, we strive to be an environmentally and economically sustainable business, recycling and reducing waste wherever possible and being as carbon neutral as possible. Choosing Environmentally Preferable Flooring from Polyflor means zero compromise in choice and the function of the product.

POLYFLOR'S ENVIRONMENTAL CREDENTIALS

- BRE A+ rating certification (ENP 415, ENP 429 & ENP 472) on 27 key ranges within homogeneous, heterogeneous, LVT and safety flooring categories
- EN 15804 EPDs verified by IBU
- ISO 14001 accreditation since 2000
- Member of the UK Green Building Council
- Fully support the Vinyl Plus commitment for 2020
- Active member of Epfloor and Recovinyl
- Co founding and funding member of Recofloor, the industry's nationwide take-back scheme
- Vinyl flooring is 100% recyclable
- Polyflor flooring can contain up to 40% recycled content
- 9,570 tonnes of post production waste recycled and 800 tonnes of post consumer waste recycled in 2013
- Reduction in dry waste of 82% in eleven years and 91% reduction in liquid waste when compared to 2000's figures
- Recycled water is 96% with just 4% coming from mains
- Pass international VOC emissions tests, including Indoor Air Comfort Gold, FloorScore, Afsset and AgBB, with no negative contribution to indoor air quality
- Low odour compared to many other floorcoverings
- Up to 85% sustainable material
- Plasticisers used by Polyflor are not classified substances and do not need authorisation under REACH. A range of ortho-phthalates and non-phthalate alternatives used across Polyflor's vinyl collection.
- 20-25 year life span means fewer replacements over the life of a building, therefore less manufacturing, energy & materials
- Energy consumption in manufacture reduced by over 46% in the last 13 years
- Carbon emissions reduced by 18,426 tonnes since 2000
- Our claims are independently audited, certified and documented



BRE Global Generic Ratings

Where Polyflor products have not been individually certificated by BRE Global, generic ratings are available. These generic ratings apply to specific categories of flooring installed into defined use areas. Vinyl flooring achieves on average a generic BRE Global A+ rating across the categories shown below.



Standard	Homogeneous EN 649	Heterogeneous EN 649	Acoustic EN 651	LVT EN 649	Safety EN 13845	Rubber (smooth) EN 1817	Rubber (profiled) EN 12199	LVS EN 653
Health Element	A+ 821570038	A+ 821570039	A+ 821570053	A+ 821570054	A+ 821570055	A+ 821570056	A+ 821570057	-
Education Element	A+ 821570065	A+ 821570066	A+ 821570010	A+ 821570013	A+ 921570010	A+ 821570014	A+ 821570015	-
Commercial Element	A 821570038	A 821570039	A 821570041	A 821570042	A 821570043	A 821570044	A 821570045	-
Retail Element	A+/A+ 821570038	A+/A+ 821570039	A+/A 821570053	A+/A 821570054	A+/A 821570055	A+/A+ 821570056	A+/A+ 821570057	-
Domestic Element	A 821570065	A 821570066	A 821570010	A 821570013	B 921570010	A 821570014	A 821570015	A 821570002

Polyflor ranges not individually assessed can be included within the appropriate generic ratings:

Safety	Homogeneous	Rubber (smooth)	Rubber (profiled)	LVS	LVT
Modena PUR	Polyflor SD	Diamant	Noppe Stud Tile	Secura	SimpLay PUR
Hydro Evolve	Finesse SD				
Ecomax	Finesse EC				
Arena PUR	Polyflor EC				
Expona Control PUR	Polyflex Plus PU				

BRE Global Certification - individual ratings

Independent, third-party certification is always important as its impartiality reassures customers that our products will perform as expected. This is why Polyflor has had the majority of its product ranges individually assessed and rated by BRE Global. Each product certificated by BRE Global has undergone a 'cradle to grave' life cycle analysis (LCA), therefore scrutinising its environmental performance throughout every stage of its life. Generic ratings are a good guidance, but are based on European production averages, whereas individual certification ensures accuracy of LCA data specific to the product and manufacturer.

Polyflor's safety, homogeneous, heterogeneous and LVT ranges have been individually assessed by BRE Global to measure their environmental impact. The rating spans from A+ to E, with A+ being the best rating. A better rating helps to maximise a building's BREEAM score, which is achievable through our 25 A+ ratings.

The BRE Global rating scheme is categorised by end use areas, as the environmental impact in each can vary. The reason for this is that various products will be available in the different sectors, which are subject to a pre-determined spread of ratings across the categories A+ to E. Therefore more options may be available within the domestic sector, for example. Overall, Polyflor's certified ratings are impressive, particularly in the key areas of health and education, where BREEAM ratings are linked to government funding. For more information on our certification, visit www.greenbooklive.com and enter 'Polyflor' into the search box.

HOMOGENEOUS	Certificate	Health	Education	Retail (fashion)	Retail (durability)	Office	Domestic
Polysafe Astral PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Mosaic PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Corona PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Vogue Ultra PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Standard PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Wood fx PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Wood fx Acoustix PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Hydro	ENP472	A+	A+	A+	A+	A	A
Polysafe Strata	ENP472	A+	A+	A+	A+	A	A
Polysafe Ultima	ENP472	A+	A+	A+	A+	A	A
HOMOGENEOUS							
Pearlazzo PUR	ENP472	A+	A+	A+	A+	A	A
2000 PUR	ENP472	A+	A+	A+	A+	A	A
Classic Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Prestige PUR	ENP472	A+	A+	A+	A+	A	A
Standard XL	ENP472	A+	A+	A+	A+	A	A
XL PU	ENP472	A+	A+	A+	A+	A	A
HETEROGENEOUS							
Forest fx PUR	ENP415	A+	A+	A+	A+	A	A
Mineral fx PUR	ENP415	A+	A+	A+	A+	A	A
Acoustix Forest fx PUR	ENP415	A+	A+	A+	A	A	B
Acoustix Gallery fx PUR	ENP415	A+	A+	A+	A+	A	A
LVT							
Expona Commercial PUR	ENP429	A+	A+	A+	A+	A	B
Expona Design PUR	ENP429	A+	A+	A+	A	B	B
Bevel Line PUR	ENP429	A+	A+	A+	A	A	A
Camaro PUR	ENP429	*	*	A+	*	A	A
Colonia PUR	ENP429	*	*	*	*	*	A

* Product not suitable for use area and has therefore not been rated for the particular use area.

Flooring Collection



Homogeneous

2-3	Pearlazzo PUR	7	2000 PUR
4	Prestige PUR	8	XL PU
5	Mystique PUR	9	Standard XL
6	Classic Mystique PUR		

Semi Flexible Tiles

10	Polyflex Plus PU
----	------------------

Safety (Polysafe)

11	Corona PUR	21	Strata
12	Astral PUR	22	Hydro
13	Mosaic PUR	23	Hydro Evolve
14-15	Modena PUR	24	Ultima
16-17	Arena PUR	25	Wood fx Acoustix PUR
18	Wood fx PUR	26	Ecomax
19	Vogue Ultra PUR	38-39	Expona Control PUR
20	Standard PUR		

Heterogeneous

27	Forest fx PUR	29	Acoustix Gallery fx PUR
28	Acoustix Forest fx PUR	30-31	Secura PUR

Luxury Vinyl Tiles

32-35	Expona Commercial PUR	42-43	Camaro PUR
36-37	Expona Design PUR	44-45	Colonia PUR
38-39	Expona Control PUR	46-47	SimpLay PUR
40-41	Bevel Line PUR	48	LVT Design Accessories

Loose Lay Tiles

46-47	SimpLay PUR
-------	-------------

ESD

49	SD Collection
50	EC Collection

Wall Cladding

51	Polyclad Pro PU
51	Polyclad Plus PU

Sport

52	Polyflor Sport
----	----------------

Rubber Flooring

53	Diamant
54	Noppe Stud Tile

Flooring Accessories

55	Ejecta
----	--------

Product Specifications

56-67

Acoustic

25	Wood fx Acoustix PUR
28	Acoustix Forest fx PUR
29	Acoustix Gallery fx PUR
30-31	Secura PUR



POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: +61 3 9215 4400
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: anthonylam@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

New Zealand

Polyflor New Zealand
Tel: +64 9 269 1111
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

Russia

Polyflor Contract Ltd
Tel: +7 (812) 332 42 02
E-mail: info@polyflor.ru

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

United Arab Emirates

Polyflor Middle East
Tel: +971 4 349 1078
E-mail: espm@eim.ae

www.polyflor.com



POLYFLOR™ HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122
UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913

UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166
TECHNICAL SUPPORT: +44 (0)161 767 1912

RECEPTION: +44 (0)161 767 1111
E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM

LIT918 03/14



James Halstead
FLOORING

