

# SOUNDTEX 5.0

LIGHT COMMERCIAL  
VINYL  
FLOOR COVERING

# SOUNDTEX 5.0 MARBLE



4547-505-4 ◀ 2 | 4 m




4261-472-3 ◀ 3 m



4547-511-4 ◀ 2 | 4 m



4547-510-4 ◀ 2 | 4 m

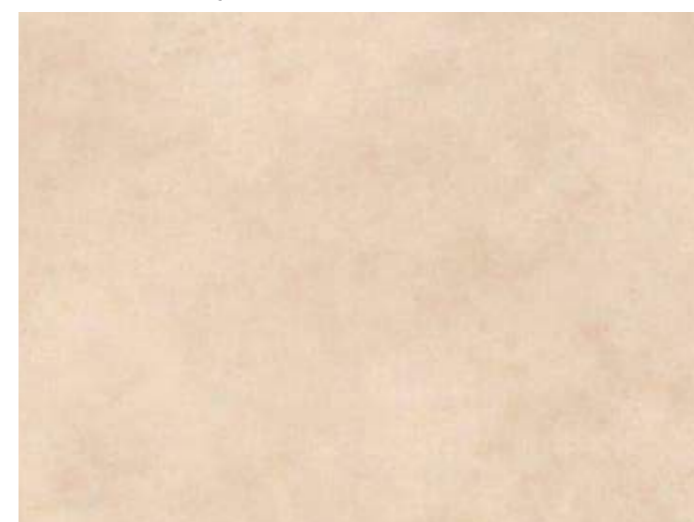

4547-509 ◀ 2 | 4 m




4261-451-3 ◀ 2 | 4 m

Grabo SOUNDTEX 5.0 floorings combine good technical characteristics with extra design features. The product ensures excellent residual indentation, good comfort feeling, and thanks to the non-woven backing it can be installed without glue, which allows easier and quicker installation, especially in renovation projects.

## RECOMMENDED USAGE

Nursery homes | Preschools | Libraries  
Dormitory rooms

## CONSTRUCTION

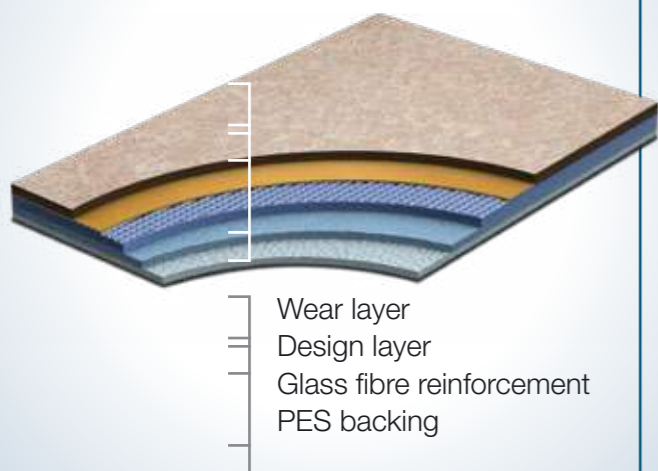

### DESCRIPTION

|                          |              |                       |
|--------------------------|--------------|-----------------------|
| Construction             |              | heterogeneous         |
| Total thickness          | EN ISO 24346 | 3,2 mm                |
| Wear layer thickness     | EN ISO 24340 | 0,5 mm                |
| Width of roll            | EN ISO 24341 | 2   3   4 m           |
| Standard length of rolls | EN ISO 24341 | 25 lm                 |
| Normal length of rolls   | EN ISO 24341 | 18-27 lm              |
| Total weight             | EN ISO 23997 | 2,2 kg/m <sup>2</sup> |


### CLASSIFICATION

|                |        |                 |
|----------------|--------|-----------------|
| Classification | EN 685 | class: 23/33/42 |
|----------------|--------|-----------------|

### PERFORMANCE

|                         |              |               |
|-------------------------|--------------|---------------|
| Residual indentation    | EN ISO 24343 | max. 0,2 mm   |
| Dimensional stability   | EN ISO 23999 | max. 0,2 %    |
| Fire resistance         | EN 13501-1   | class: Cfl-s1 |
| Slip resistance         | EN 13893     | class: R9     |
| Light fastness          | EN 20105 B02 | grade 6       |
| Abrasion group          | MSZ EN 660-1 | T             |
| Castor chair resistance | EN ISO 4918  | ✓             |
| Warranty                |              | 7 year        |

# SOUNDTEX 5.0 NATURAL

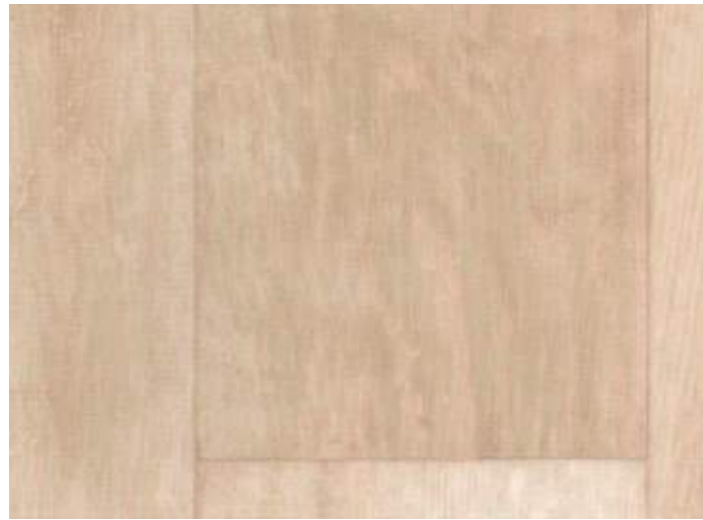

4235-452-5 ◀ 2 | 4 m



4259-501-5 ◀ 2 | 4 m



4235-456-5 ◀ 2 | 4 m



4266-453-4 ◀ 2 | 3 | 4 m



4235-469-5 ◀ 2 | 4 m




4262-467-4 ◀ 2 | 3 | 4 m



4259-504-5 ◀ 2 | 4 m



4263-482-4 ◀ 2 | 3 | 4 m

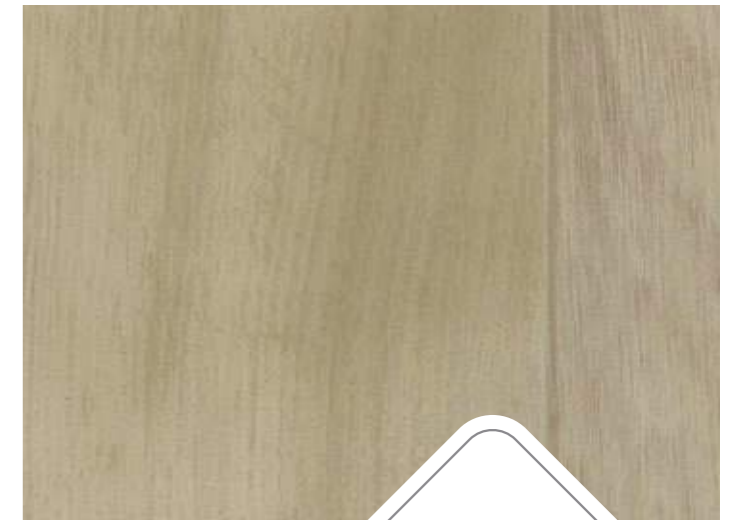

4259-503-5 ◀ 2 | 4 m